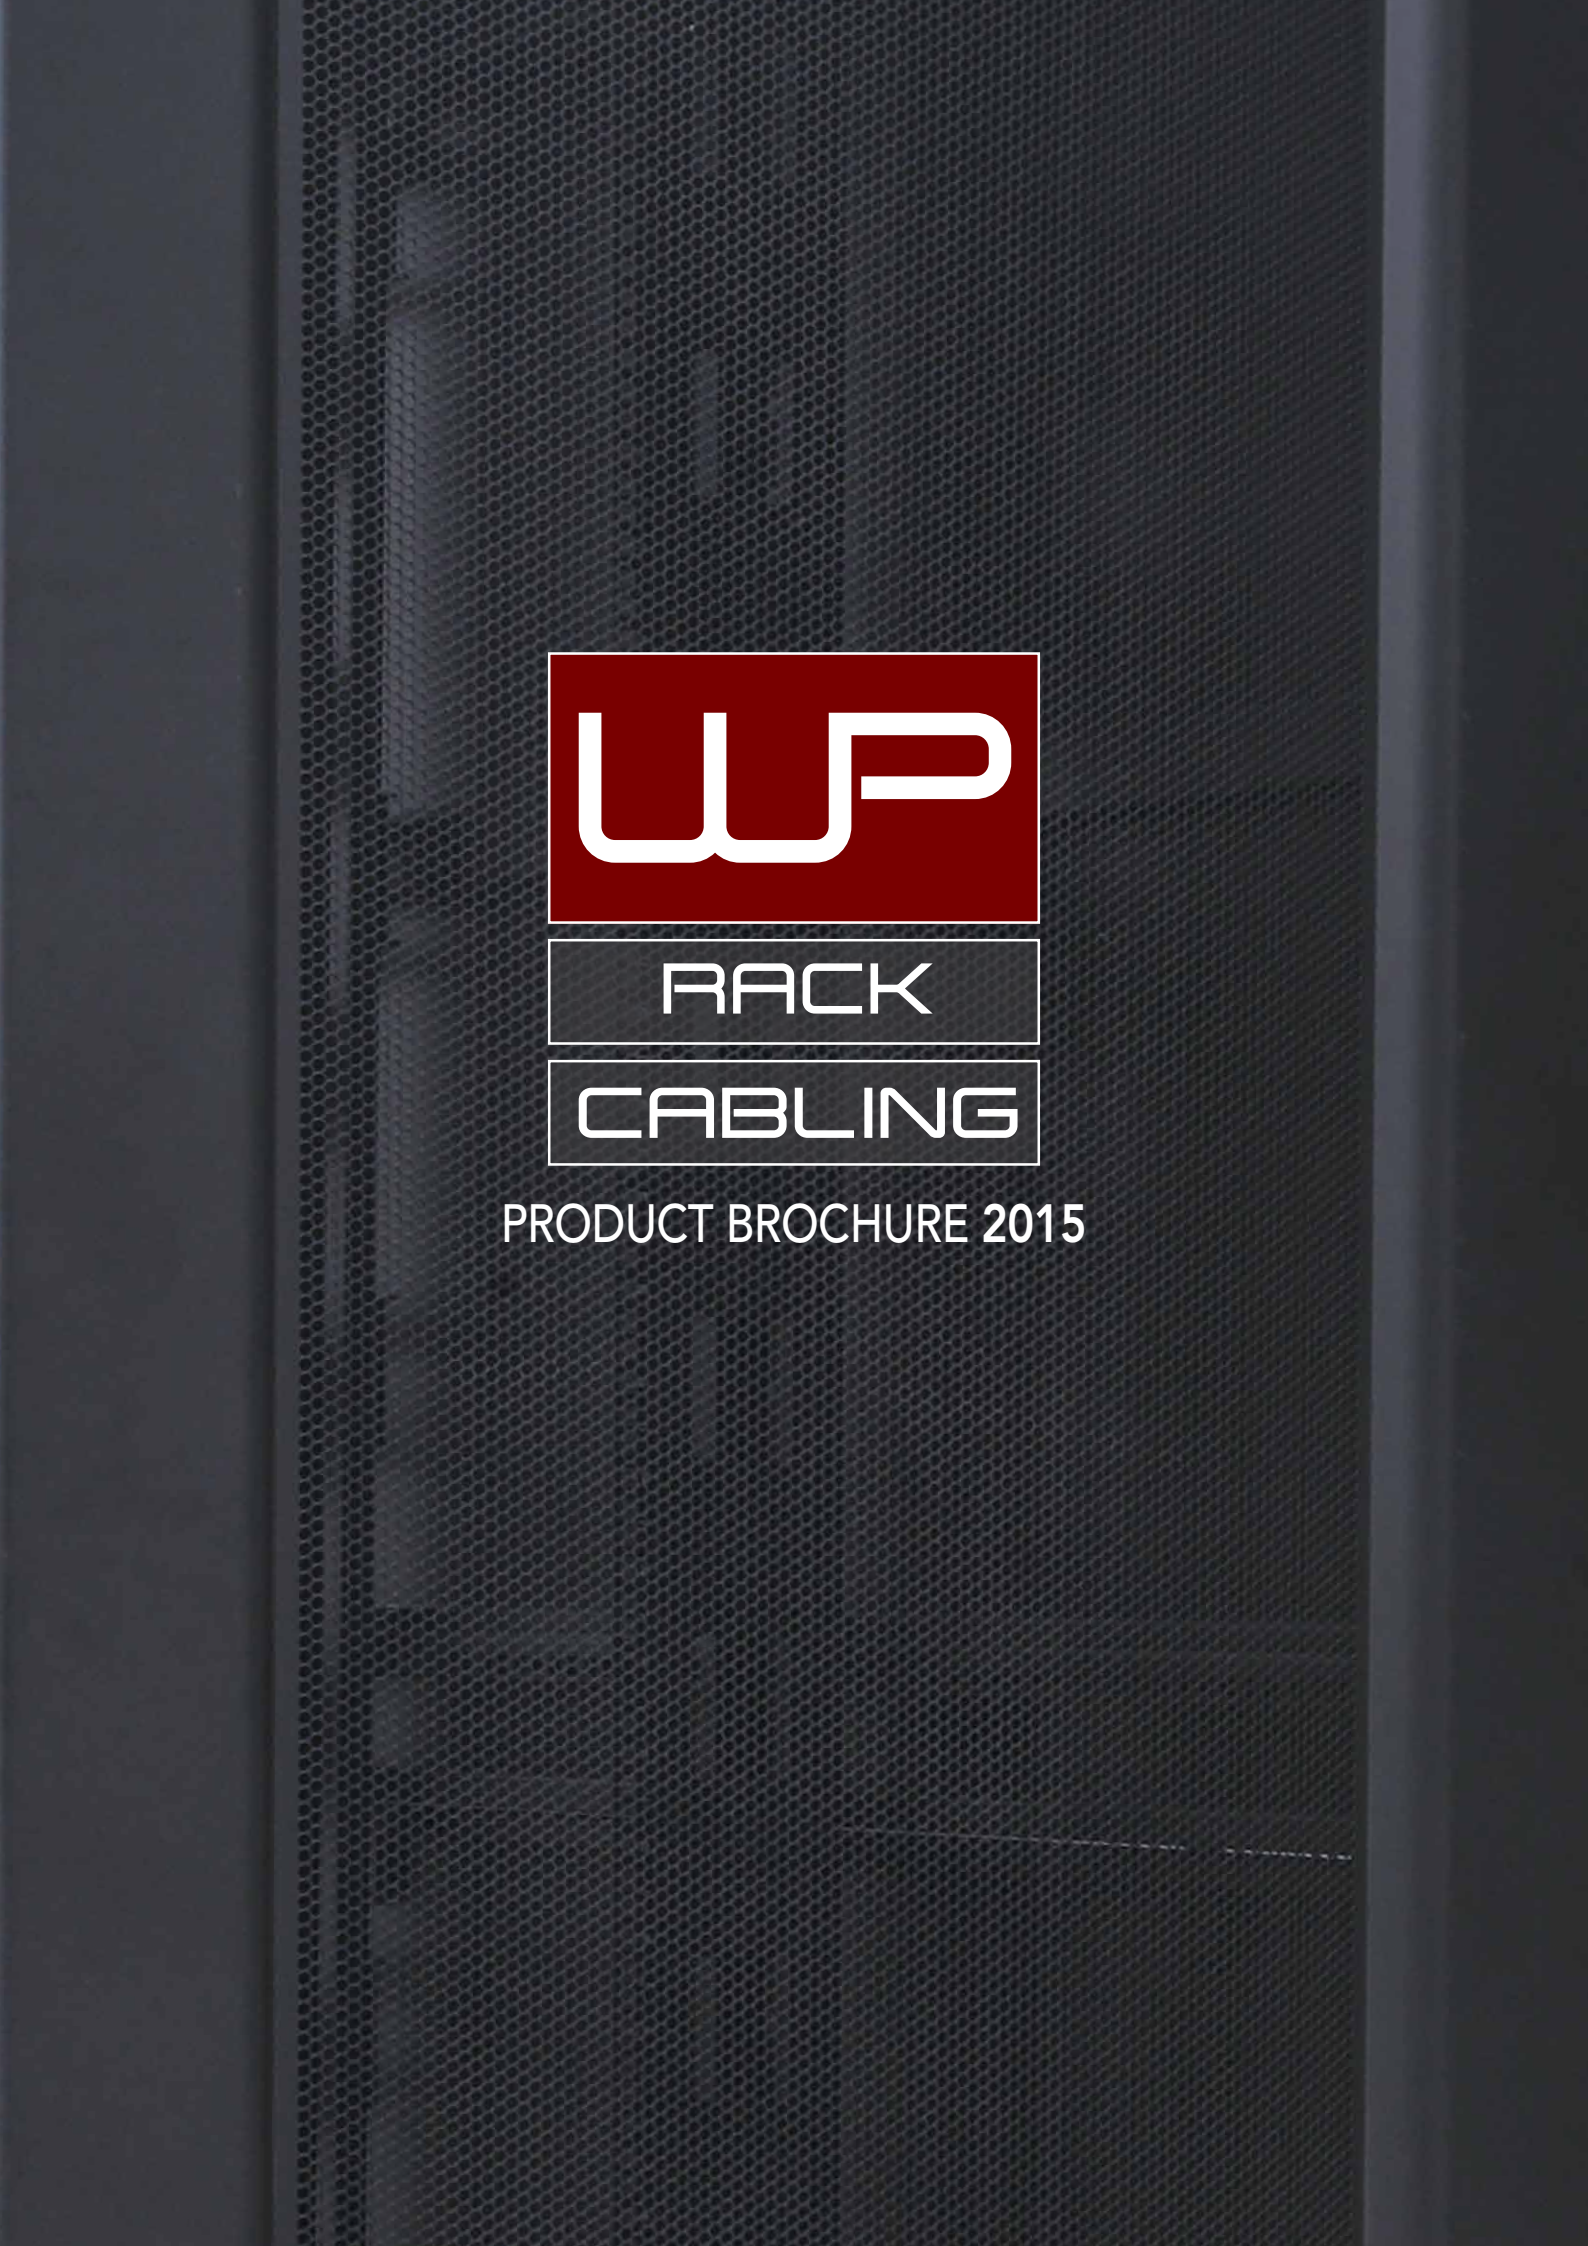
WP
RACK
CABLING
PRODUCT BROCHURE 2015

WP RACK and **WP CABLING** are two brands known for their quality and reliability resulting from a more than thirty-year experience in the IT and telecommunication fields.

CONFORMITY

ISO 9001:2008	Quality management system
EN 60950-1:2006	CE information technological systems-safety-Part1 - General requirements
IEC 297-1	In compliance with the 19" (19"Unit) standard
IEC 297-2	In compliance with the cabinet sizes (Metric unit)
RoHS compliant	In compliance with the norm 2002/95/CE

WP EUROPEAN CABLING SOLUTION
www.wp-europe.info - sales@wp-europe.info

follow us on www.facebook.com/wpeurope

INDEX

RACKS 04-18

› Standing Racks › Wall-Mounted

RACKS ACCESSORIES 19-23

› Shelves › Cooling Units › Cable Management Panels
› Blank Panels › Multiple Sockets › Accessories

FIBER OPTIC 24-29

› Fiber Optic Patch Cables › Modular Fiber Optic Splice Box
› Fiber Optic Adapters

COPPER COMPONENTS 30-38

› Patch Cables 5e › Patch Cables 6 › Twisted Pair Cables
› Keystone Modules › Patch Panels › Couplers › Plugs

SYMBOL LEGEND

1. 15 years warranty on the WP RACK cabinet
2. Removable side panels
3. Grounding kit included
4. Screws and M6 cage nuts kit included
5. 4 foots and 4 wheels kit inluded
6. Package made up of a 2cm cardboard for preventing damages during transport
7. Simple multilanguage assembling instructions

1 2 3 4 5 6 7

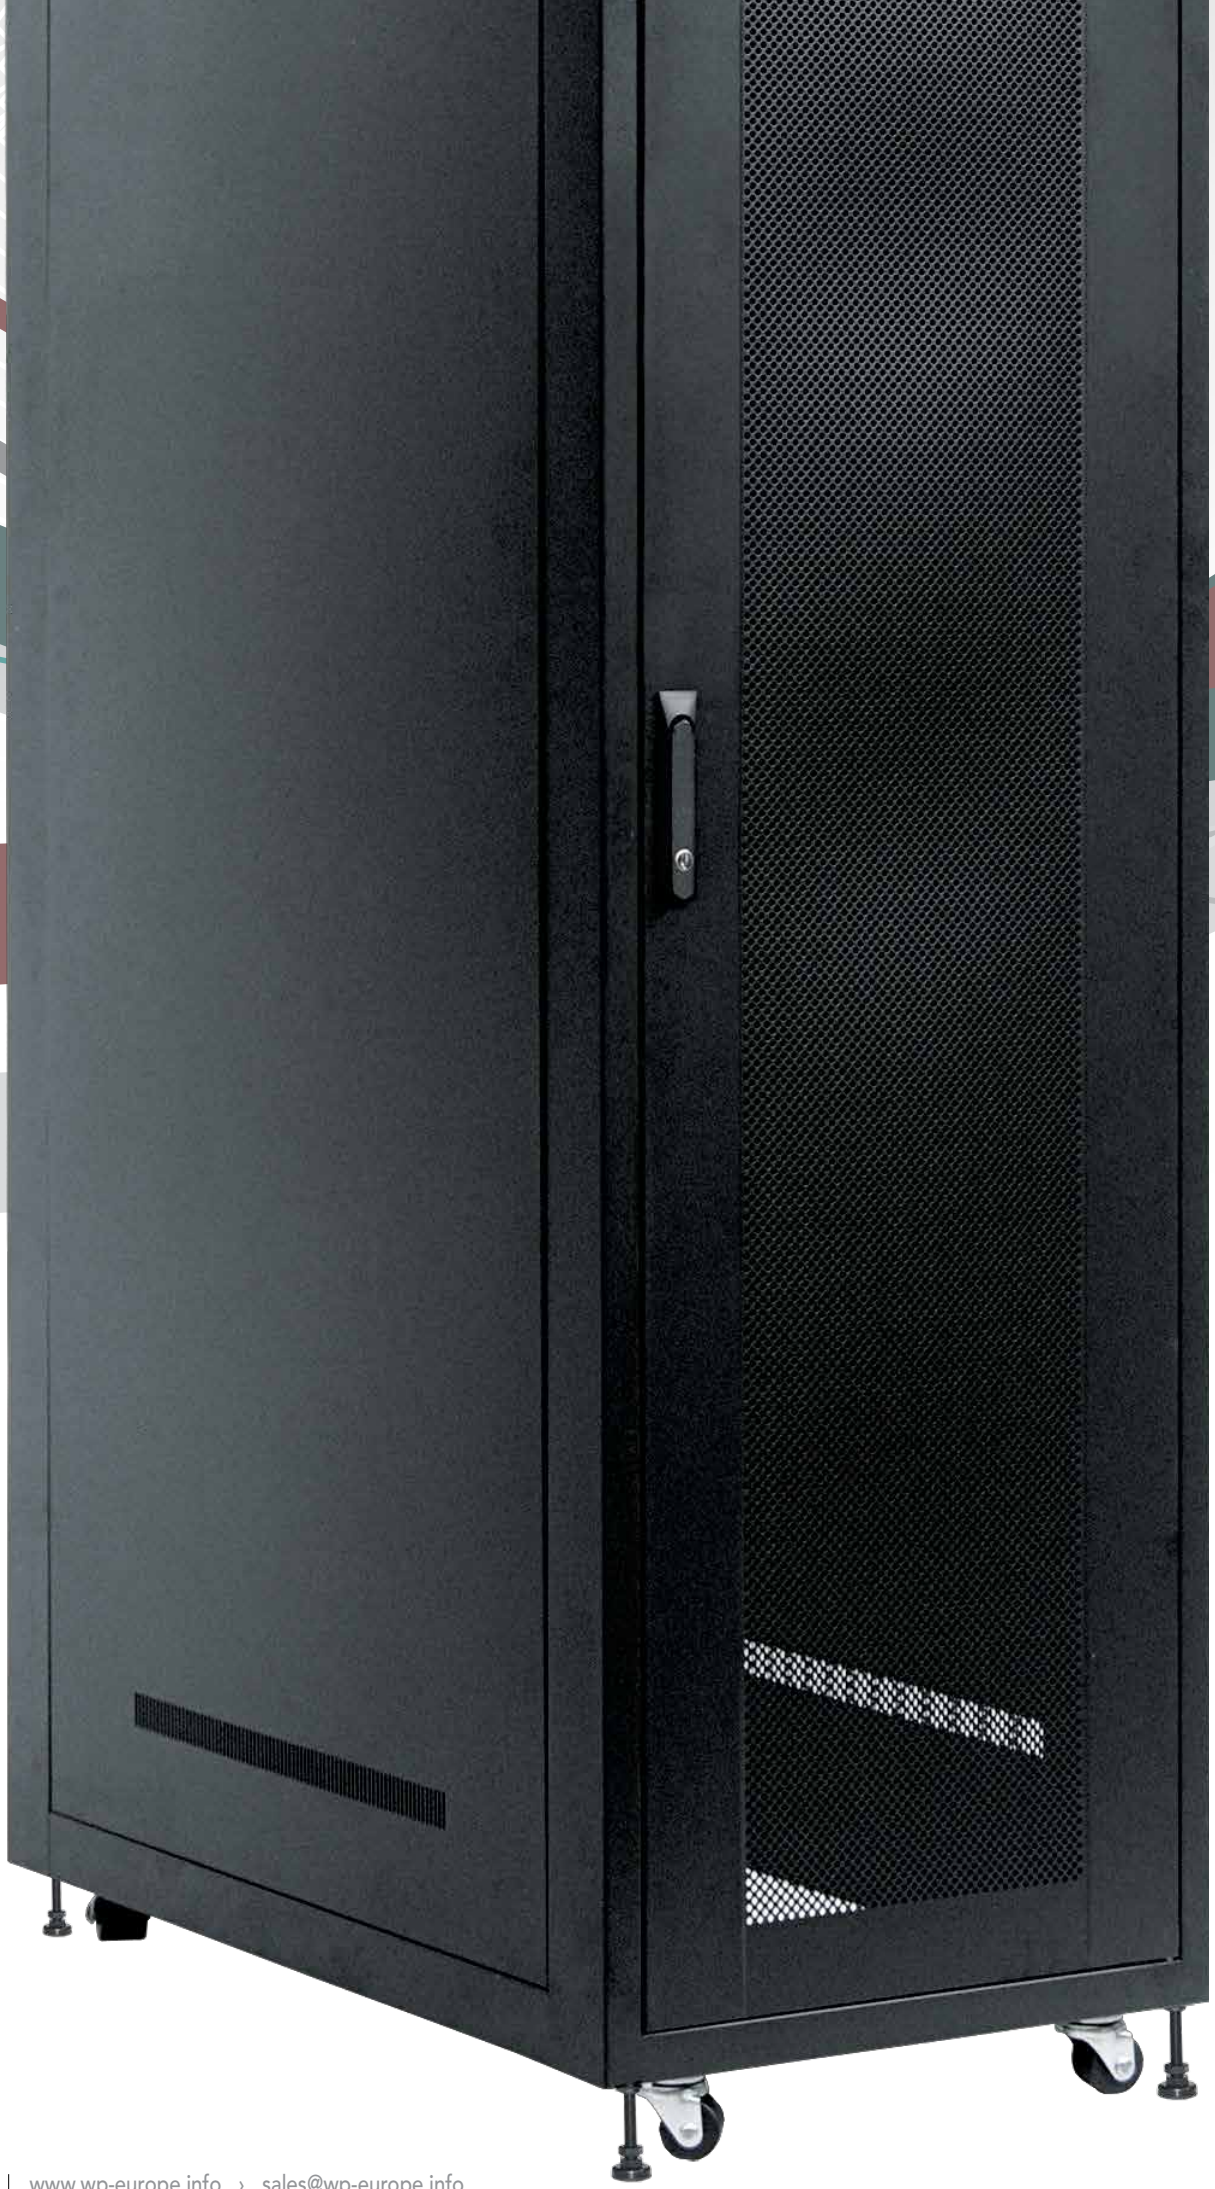

RACKS & ACCESSORIES

Strong points of **WP RACK®** cabinets are the European design, high quality of materials, reliability and longevity.
The product offer is very wide and covers all possible needs in the IT and telecommunication fields. From wall mounted 19" racks designed for small companies with 6 to 20 units to standing 19" racks with 22 to 42 units for bigger companies, each one with different depths depending on the final application of use.
Finally it is possible to choose among a high range of accessories and components designed for making the final product custom-made and ideal for any particular use.

15 YEARS WARRANTY

RSA SERVER SERIES STANDING RACKS

Robustness

The main structure in 2mm solid steel ensures a static loading capacity up to 1000 kg.

Handiness

The side panels are hinged and removable for easy installation and maintenance of the equipment.

Fast Assembling

The possibility of choosing to buy it assembled or disassembled simplifies transport and reduces the risk of damages during transportation.

Versatility

Equipped with: 4 adjustable rails, numbered for simplifying the installation of the equipment; Perforated steel door; Top panel designed for supporting the fan unit.

Security

Front door equipped with spring-loaded handle and lock with key, side panels with an innovative inside locking system that does not require a key.

Accessories

Supplied with grounding kit, 40 sets of screws + cage nuts, 4 leveling feet and 4 heavy-duty casters. It is also available a wide range of accessories to satisfy every requirement!

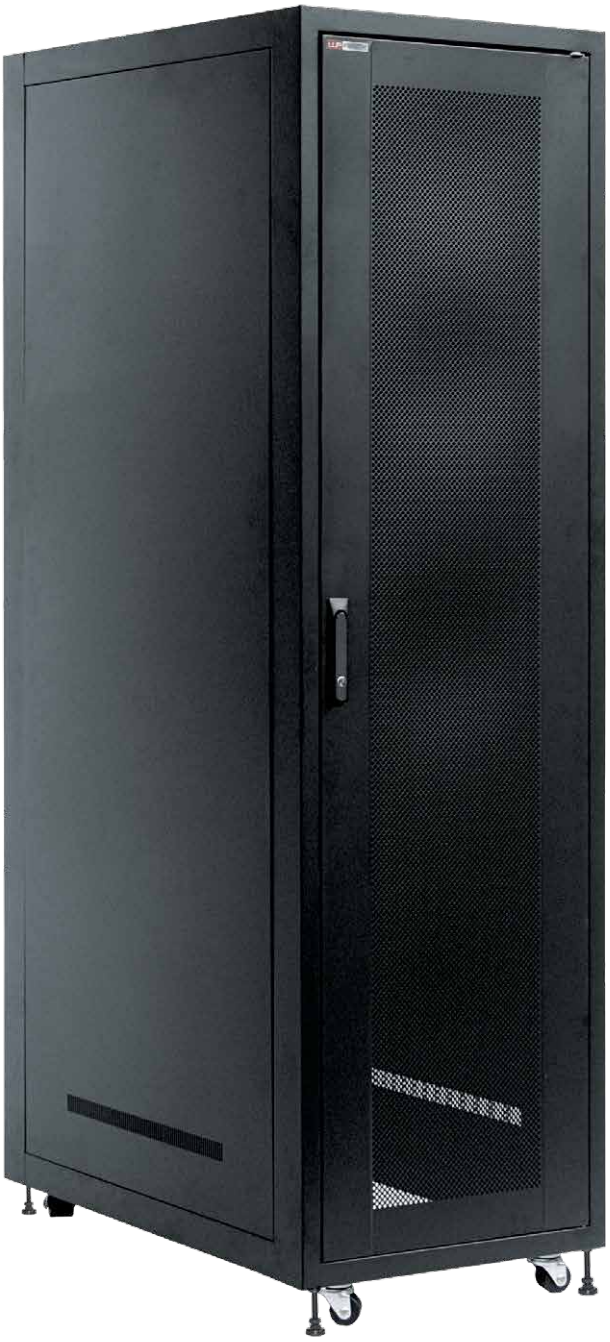

› numbered front struts detail



› grounding detail

› perforated steel door detail

The perforated steel front door, the 2mm steel frame, the removable side panels with innovative locking system from the inside, the 4 heavy-duty casters with 4 leveling feets make this series the most complete high end installation solution.
Furthermore, the possibility of choosing to buy it assembled or disassembled, simplifies transport and reduces the risk of damage in transit to the site.

- Supplied fully disassembled in one reinforced cardboard box
- Main structure in 2mm solid steel, 1.5mm steel sides
- Perforated steel door equipped with spring-loaded handle and lock with key
- The side panels are hinged and removable for easy installation and maintenance of the equipment and have an innovative inside locking system that does not require a key
- Modular cable entry on top that allows the opening/closing of individual plastic covers
- Structure without base (sold separately) for better ventilation
- Housing for 120mm fans or special ventilation kit on the top.
- Load capacity up to 1000kg
- Complete with 4 numbered front struts with adjustable depth
- Complete with leveling feet and 4 heavy-duty casters
- Grounding kit included
- 40 sets of screws included (screws + cage nuts)
- Colour: Black, RAL 9005
- IP 20 protection class

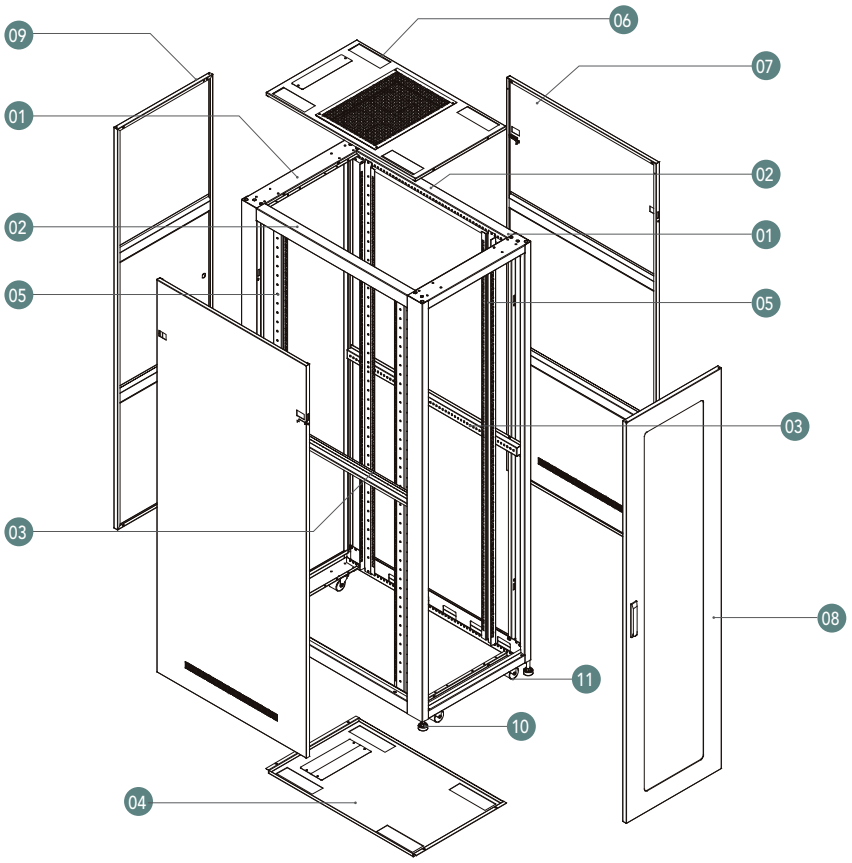

› package detail (2cm thick)

01 frame
02 rail
03 horizontal rail
04 base (optional)
05 vertical rail
06 top panel
07 side panel
08 frontal door
09 back door
10 stabilizer foots
11 wheel

CODE	ASSEMBLED	UNIT N.	SIZES			WEIGHT	COLOUR
			W	D	H	kg	RAL 9005
WPN-RSA-27610-BS		27	600	1000	1388	75	•
WPN-RSA-27610-B	•	27	600	1000	1388	75	•
WPN-RSA-42610-BS		42	600	1000	2055	132	•
WPN-RSA-42610-B	•	42	600	1000	2055	132	•
WPN-RSA-42812-BS		42	800	1200	2055	145	•
WPN-RSA-42812-B	•	42	800	1200	2055	145	•

RSA SERIES ACCESSORIES	
CODE	DESCRIPTION
WPN-AFS-S141100-B	Fixed shelf for rack up to 1000 mm, 4 attachment points, RAL 9005, max 45 kg
WPN-AFS-S241100-B	Fixed shelf for rack up to 1000 mm, 4 adjustable attachment points, RAL 9005, max 65 kg
WPN-AFS-S241120-B	Fixed shelf for rack up to 1200 mm, 4 adjustable attachment points, RAL 9005, max 65 kg
WPN-ACS-S100-4	Fan tray for 1000 mm deep cabinets, 4 fans + thermostat, RAL 9005
WPN-ACS-S120-4	Fan tray for 1200 mm deep cabinets, 4 fans + thermostat, RAL 9005
WPN-ABS-RSA610-B	Bottom plate, 600x1000 mm, RAL 9005
WPN-ABS-RSA812-B	Bottom plate, 800x1200 mm, RAL 9005

› RAL 9005 [black]

RNA SERVER SERIES STANDING RACKS

Robustness

The main structure in 2mm solid steel ensures a static loading capacity up to 800 kg.

Handiness

Removable side panels for easy installation of the equipment.

Fast Assembling

The possibility of choosing to buy it assembled or disassembled simplifies transport and reduces the risk of damages during transportation.

Versatility

Equipped with: 4 adjustable rails, numbered for simplifying the installation of the equipment; Tempered glass door openable at 180°; Top panel designed for supporting the fan unit.

Security

Front door equipped with spring-loaded handle and lock with key, also two locks on the side panels for a total security!

Accessories

Supplied with grounding kit, 20/40 sets of screws + cage nuts, 4 leveling feet and 4 casters (two with brake). It is also available a wide range of accessories to satisfy every requirement!

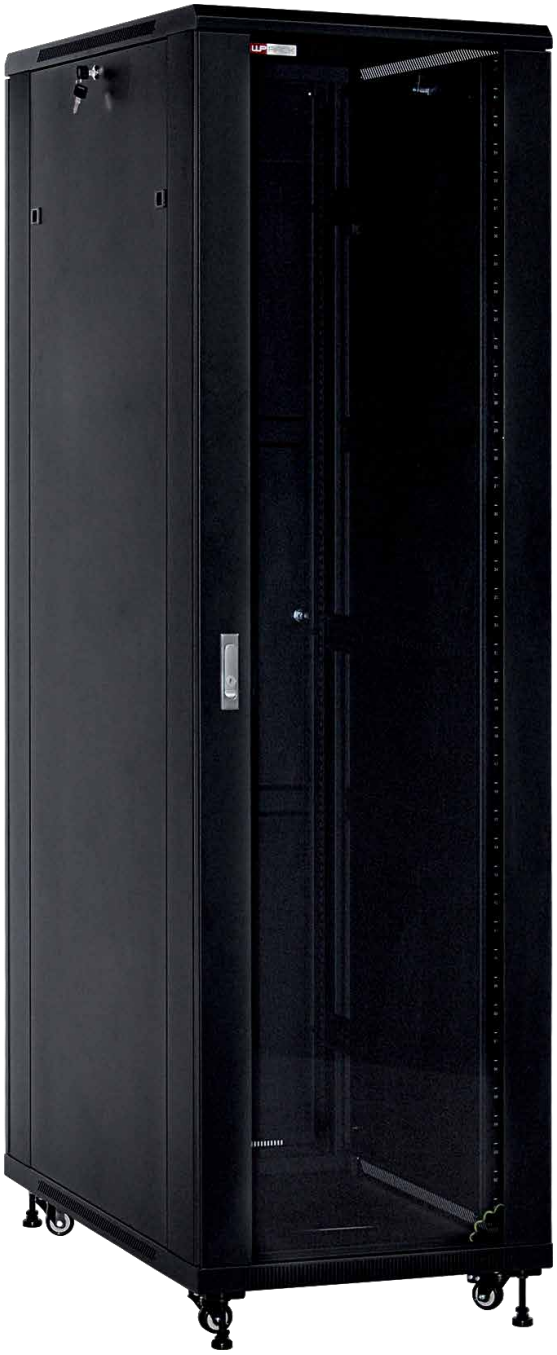

› wheel, foot and grounding kit

› side key

› spring lock

The tempered glass door, the 2mm steel frame, the locks (also on the removable side panels), the 4 casters and 4 leveling feets make this series a complete solution for your installation.
Furthermore, the possibility of choosing to buy it assembled or disassembled, simplifies transport and reduces the risk of damage in transit to the site.

- Supplied fully disassembled in one reinforced cardboard box
- Main structure in 2mm solid steel, 1.5mm steel sides
- The tempered glass door opens to 180° has a 1.5mm metal frame and is provided with a handle and lock with key
- Removable side panels, also with locks and keys, for easy installation of the equipment
- Cable entry both on top and bottom (with cover)
- Housing for 120mm fans or special ventilation kit on the top.
- Load capacity up to 800kg
- Complete with 4 numbered front struts with adjustable depth
- Complete with leveling feet and 4 casters (2 with a brake)
- Grounding kit included
- 20/40 sets of screws included (screws + cage nuts)
- Colour: Black, RAL 9005
- IP 20 protection class

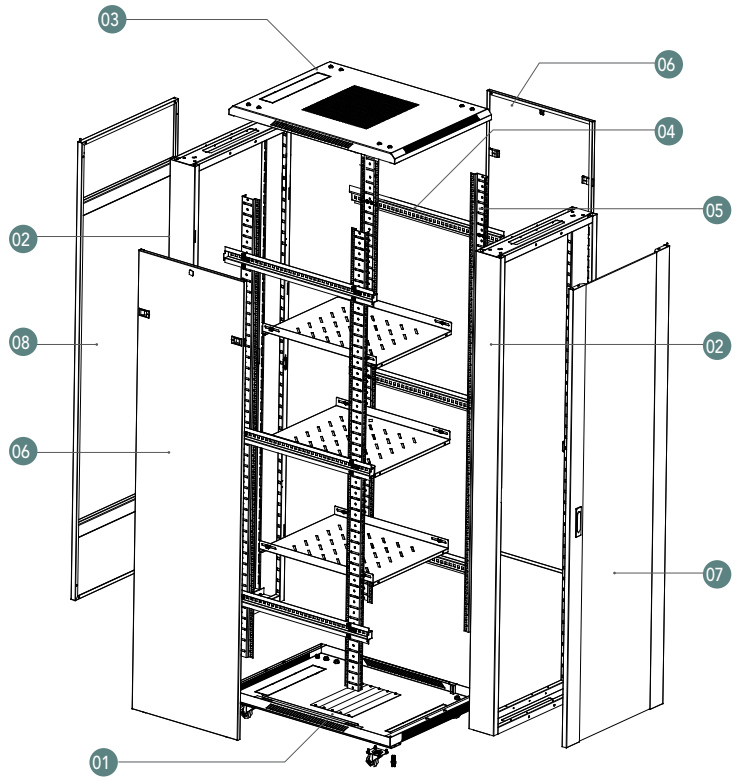

› package detail (2cm thick)

01 base
02 frame
03 top panel
04 horizontal rail
05 vertical rail
06 side panels
07 frontal door
08 back door

CODE	ASSEMBLED	UNIT N.	SIZES			WEIGHT	COLOUR	SCREWS SET
			W	D	H	kg	RAL 9005	INCLUDED
WPN-RNA-22606-BS		22	600	600	1166	64	•	20
WPN-RNA-22606-B	•	22	600	600	1166	64	•	20
WPN-RNA-22608-BS		22	600	800	1166	67,2	•	20
WPN-RNA-22608-B	•	22	600	800	1166	67,2	•	20
WPN-RNA-27606-BS		27	600	600	1388	71	•	20
WPN-RNA-27606-B	•	27	600	600	1388	71	•	20
WPN-RNA-27608-BS		27	600	800	1388	74	•	20
WPN-RNA-27608-B	•	27	600	800	1388	74	•	20
WPN-RNA-32606-BS		32	600	600	1610	82,5	•	20
WPN-RNA-32606-B	•	32	600	600	1610	82,5	•	20
WPN-RNA-32608-BS		32	600	800	1610	92,2	•	20
WPN-RNA-32608-B	•	32	600	800	1610	92,2	•	20
WPN-RNA-42606-BS		42	600	600	2055	98,5	•	20
WPN-RNA-42606-B	•	42	600	600	2055	98,5	•	20
WPN-RNA-42608-BS		42	600	800	2055	110	•	20
WPN-RNA-42608-B	•	42	600	800	2055	110	•	20
WPN-RNA-42610-BS		42	600	1000	2055	122	•	40
WPN-RNA-42610-B	•	42	600	1000	2055	122	•	40

RNA SERIES ACCESSORIES	
CODE	DESCRIPTION
WPN-AFS-41060-B	Fixed shelf for rack up to 600 mm, 4 attachment points, RAL 9005, max 45 kg
WPN-AFS-41080-B	Fixed shelf for rack up to 800 mm, 4 attachment points, RAL 9005, max 45 kg
WPN-AFS-41100-B	Fixed shelf for rack up to 1000 mm, 4 attachment points, RAL 9005, max 45 kg
WPN-ACS-N060-2	Fan Tray for 600 mm deep cabinets, 2 fans + thermostat, RAL 9005
WPN-ACS-N080-4	Fan Tray for 800 mm deep cabinets, 4 fans + thermostat, RAL 9005
WPN-ACS-N100-4	Fan Tray for 1000 mm deep cabinets, 4 fans + thermostat, RAL 9005
WPN-APT-N66	Plinth, 600x600 mm, RAL 9005
WPN-APT-N68	Plinth, 600x800 mm, RAL 9005

› RAL 9005 [black]

RWA SoHo SERIES WALL MOUNTED

Robustness

The welded frame and the robust and reliable stucture ensures a static loading capacity up to 50 kg.

Handiness

Removable side panels for easy installation of the equipment.

Fast Assembling

Preassembled, easy to install and ready to use.

Versatility

Equipped with: 2/4 adjustable rails, numbered for simplifying the installation of the equipment; Tempered glass door openable at 180°; Top panel designed for supporting the fan unit.

Security

Front door equipped with lock.

Accessories

Supplied 12 sets of screws + cage nuts. It is also available a wide range of accessories to satisfy every requirement!

› numbered rails

› lock and key

› removable side panel

The welded frame and the sturdy and safe structure allows both wall mounting and placement on the floor.

- 1.5 mm solid steel structure
- Glass door opens to 180° and has a lock and key
- The direction of the door opening can be changed as required
- Removable side panels for easy installation of the equipment
- Cable entry on both top and bottom
- Housing for 120mm fans or special ventilation kit on the roof.
- Load capacity up to 50kg
- Complete with 2/4 numbered rails with adjustable depth
- 12 sets of screws included (screws + cage nuts)
- Colour: Black, RAL 9005
- IP 20 protection class

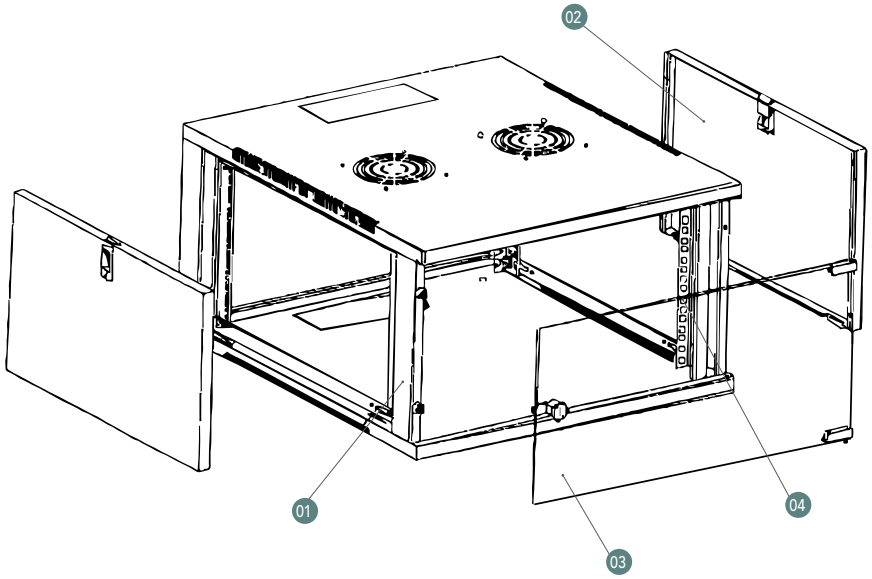

01 frame
02 side panel
03 front door
04 vertical rail

› package detail

15 years

CODE	ASSEMBLED	UNIT N.	SIZES			WEIGHT	COLOUR	RAILS
			W	D	H	kg	RAL 9005	
WPN-RWA-06604-B	•	6	540	450	310	**14**	•	2
WPN-RWA-09604-B	•	9	540	450	445	**18**	•	4
WPN-RWA-12604-B	•	12	540	450	580	**23**	•	4

RWA SERIES ACCESSORIES	
CODE	DESCRIPTION
WPN-ACS-W040-2	Fan Tray - 2 fans with protection grid + thermostat, RAL 9005, power supply 230V-50Hz

› RAL 9005 [black]

RWB PROFESSIONAL SERIES WALL MOUNTED

Robustness

The welded frame and the robust and reliable stuctu-re ensures a static loading capacity up to 60 kg.

Handiness

Removable side panels for easy installation of the equipment.

Fast Assembling

Preassembled, easy to install and ready to use.

Versatility

Equipped with: 2/4 adju-stable rails, numbered for simplifying the installation of the equipment; Tempe-red glass door openable at 180°; Top panel designed for supporting the fan unit.

Security

Front door equipped with lock and two more locks on the side panels for a total security!

Accessories

Supplied with grounding kit, 12 sets of screws + cage nuts. It is also available a wide range of accessories to satisfy every requirement!

› grounding

› lock and key

› removable side panel

The tempered glass door, the welded frame, and the sturdy and safe structure, and the locks (also on the removable side panels) are just some of the main features of this series of networking cabinets.

- 1.5 mm solid steel structure
- Tempered glass door opens to 180° and has a lock and key
- The direction of the door opening can be changed as required
- Removable side panels, also with lock and key, for easy installation of the equipment
- Cable entry on both top and bottom (with cover)
- Housing for 120mm fans or special ventilation kit on the top.
- Load capacity up to 60kg
- Complete with 2/4 numbered rails with adjustable depth
- Grounding kit included
- 12 sets of screws included (screws + cage nuts)
- IP 20 protection class

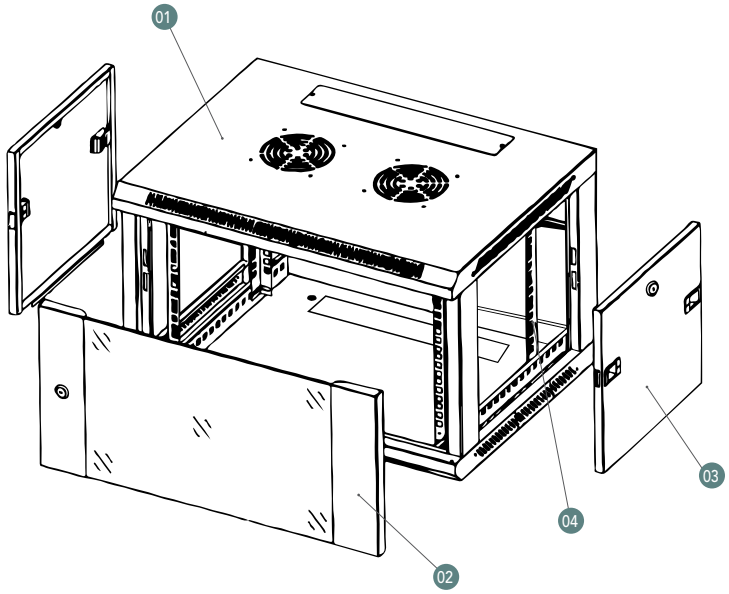

01 top cover
02 front door
03 side panel
04 vertical rail

› package detail

CODE	ASSEMBLED	UNIT N.	SIZES			WEIGHT	COLOUR		RAILS
			W	D	H	kg	RAL 9005	RAL 7035	
WPN-RWB-06605-B	•	6	600	500	370	16,5	•		2
WPN-RWB-06605-G	•	6	600	500	370	16,5		•	2
WPN-RWB-09605-B	•	9	600	500	500	21	•		4
WPN-RWB-09605-G	•	9	600	500	500	21		•	4
WPN-RWB-12605-B	•	12	600	500	635	24	•		4
WPN-RWB-12605-G	•	12	600	500	635	24		•	4
WPN-RWB-12606-B	•	12	600	600	635	26	•		4
WPN-RWB-12606-G	•	12	600	600	635	26		•	4
WPN-RWB-15606-B	•	15	600	600	770	28	•		4
WPN-RWB-20606-B	•	20	600	600	1000	36	•		4

RWB SERIES ACCESSORIES	
CODE	DESCRIPTION
WPN-ACS-W050-2	Fan Tray - 2 fans with protection grid + thermostat, RAL 9005, power supply 230V-50Hz, for 500mm deep racks
WPN-ACS-W060-2	Fan Tray - 2 fans with protection grid + thermostat, RAL 9005, power supply 230V-50Hz, for 600mm deep racks

› RAL 9005 [black] › RAL 7035 [grey]

RWD DOUBLE SECTION SERIES WALL MOUNTED

Robustness

The welded frame and the robust and reliable stuctu-re ensures a static loading capacity up to 60 kg.

Handiness

Removable side panels and rear swing frame for easy installation of the equipment.

Fast Assembling

Preassembled, easy to install and ready to use.

Versatility

Equipped with: 2/4 adju-stable rails, numbered for simplifying the installation of the equipment; Tempe-red glass door openable at 180°; Top panel designed for supporting the fan unit.

Security

Front door, rear swing frame and side panels equipped with lock for a total security!

Accessories

Supplied 12 sets of screws + cage nuts. It is also available a wide range of accessories to satisfy every require-ment!

› rear swing frame with lock and key

› removable lateral panel with lock and key

› numbered rails

The wall mounted professional double section rack series RWD simplify the installation of accessories through access to the middle section.

The tempered glass door, the welded frame, and the sturdy and safe structure, and the locks (also on the removable side panels) are just some of the main features of this series of networking cabinets.

- 1.5 mm solid steel structure
- Tempered glass door opens to 180° and has a lock and key
- The direction of the door opening can be changed as required
- Removable side panels, also with lock and key, for easy installation of the equipment
- Cable entry on both top and bottom (with cover)
- Housing for 120mm fans or special ventilation kit on the top.
- Load capacity up to 60kg
- With 2/4 numbered front rails with adjustable depth
- Grounding kit included
- 12 sets of screws included (screws + cage nuts)
- IP 20 protection class

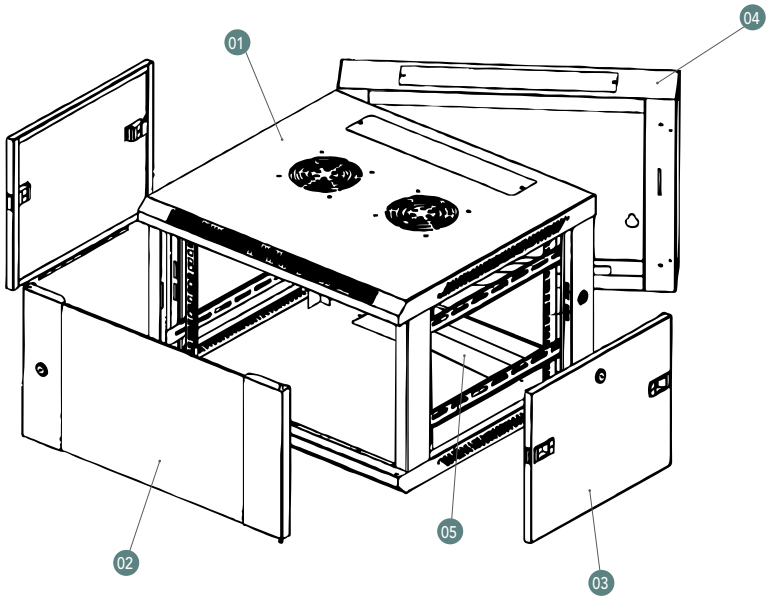

01 top cover
02 front door
03 side panel
04 rear swing frame
05 L-shaped bracket

› package detail

15 years

CODE	ASSEMBLED	UNIT N.	SIZES			WEIGHT	COLOUR		RAILS
			W	D	H	kg	RAL 9005	RAL 7035	
WPN-RWD-06605-B	•	6	600	500	370	27,0	•		2
WPN-RWD-09605-B	•	9	600	500	500	33,0	•		4
WPN-RWD-12605-B	•	12	600	500	635	37,0	•		4

› RAL 9005 [black]

RWS SECURITY SERIES WALL MOUNTED

Robustness

The welded frame and the robust and reliable stuctu-re ensures a static loading capacity up to 60 kg.

Handiness

Removable door for easy installation of the equipment.

Fast Assembling

Preassembled, easy to install and ready to use.

Versatility

Equipped with: 2 adju-stable rails, numbered for simplifying the instal-lation of the equipment; Availabel with a right- or left-openable door.

Security

Double-bitted lock, fron-tal door sliding laterally in steel, cable entry hole designed for preventing hands to pass inside. This is our security formula!

Accessories

Supplied 12 sets of screws + cage nuts. It is also available a wide range of accessories to satisfy every require-ment!

› double-bitted lock

› cable entry hole

›sliding door

The 19" rack RWS series has been designed for all those applications where the safety of the installed IT equipment comes first.

- Sliding door opens sideways.
- Made of solid steel 1,5 mm
- Double-bitted lock
- Prese d'aria laterali
- Load capacity up to 60kg
- Complete with 2 numbered rails with adjustable depth
- 12 sets of screws included (screws + cage nuts)
- Colour: Black, RAL 9005
- IP 20 protection class

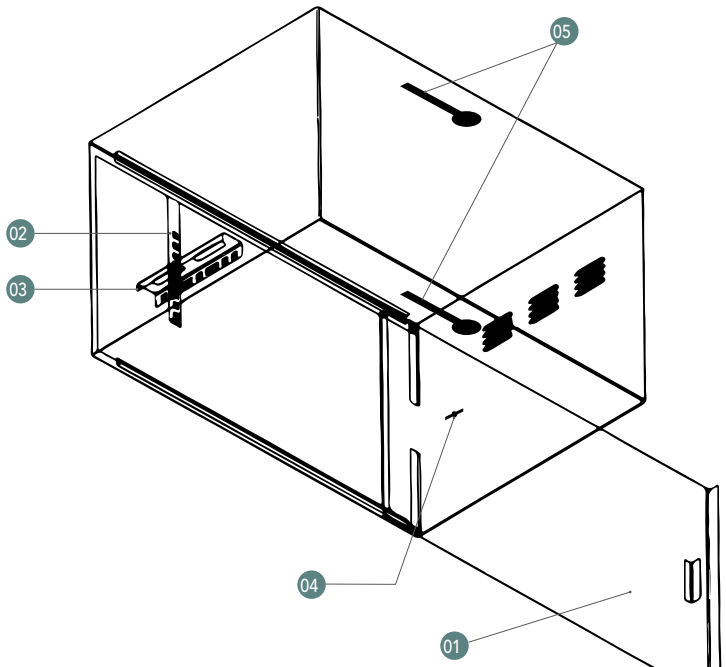

01 door
02 vertical rail
03 horizontal rail
04 lock
05 cables entry hole

› package detail

15 years

CODE	OPENING SIDE	UNIT N.	SIZES			WEIGHT	COLOUR	RAILS
			W	D	H	kg	RAL 9005	
WPN-RWS-06504L-B	Left	6	560	400	400	**15**	•	2
WPN-RWS-06504R-B	Right	6	540	450	445	**15**	•	2

› RAL 9005 [black]

ROA OPEN FRAME SERIES WALL MOUNTED

Robustness

The robust and reliable stucture ensure a static loading capacity up to 10 kg.

Handiness

The most economical solution to keep the structured cabling orderd.

Fast Assembling

Preassembled, easy to install and ready to use.

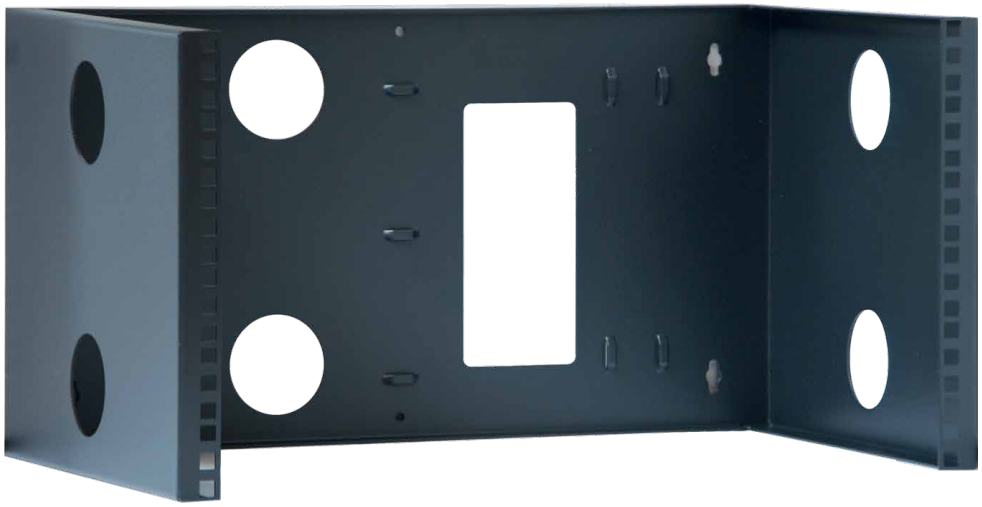

The wall mounted Open Frame Rack is an economical solution for securely attaching standard 19" peripherals.

- Sturdy steel structure
- Load capacity up to 10kg
- Colour: Black, RAL 9005

› package detail

15 years

CODE	ASSEMBLED	UNIT N.	SIZES			WEIGHT	COLOUR
			W	D	H	kg	RAL 9005
WPN-ROA-04603-BU	-	4	500	305	178	4,2	•
WPN-ROA-06603-BU	-	6	500	305	267	5,8	•

› RAL 9005 [black]

FIXED SHELF

Fixed shelf, 1/2 units, with 2 attachment points standard 19". The perforated shelf, ensures optimal ventilation.

› 4 sets of screws included (screws + cage nuts)
› Colour RAL 9005 (black)
› Load capacity up to 25kg

CODE	DESCRIPTION
WPN-AFS-21030-B	1U shelf, depth 300 mm
WPN-AFS-21035-B	1U shelf, depth 350 mm
WPN-AFS-22035-B	2U shelf, depth 350 mm

FIXED SHELF FOR **RSA SERIES**

Fixed shelf, 1 unit, with 4 attachment points standard 19". The perforated shelf, ensures optimal ventilation.

› 4 sets of screws included (screws + cage nuts)
› Colour RAL 9005 (black)
› Load capacity up to 65kg

CODE	DESCRIPTION
WPN-AFS-S141100-B	1U shelf, for 1000 mm deep racks
WPN-AFS-S241100-B	1U shelf, for 1000 mm deep racks
WPN-AFS-S241120-B	1U shelf, for 1200 mm deep racks

FIXED SHELF FOR **RNA SERIES**

Fixed shelf, 1 unit, with 4 attachment points standard 19". The perforated shelf, ensures optimal ventilation.

› 4 sets of screws included (screws + cage nuts)
› Colour RAL 9005 (black)
› Load capacity up to 45kg

CODE	DESCRIPTION
WPN-AFS-41060-B	1U shelf, for 600 mm deep racks
WPN-AFS-41080-B	1U shelf, for 800 mm deep racks
WPN-AFS-41100-B	1U shelf, for 1000 mm deep racks

SLIDING SHELF

Sliding shelf, 1 unit, with 4 attachment points standard 19". The perforated shelf, ensures optimal ventilation.

› 4 sets of screws included (screws + cage nuts)
› Colour RAL 9005 (black)
› Load capacity up to 25kg

CODE	DESCRIPTION
WPN-ASS-141060-B	1U shelf, for 600 mm deep racks
WPN-ASS-141080-B	1U shelf, for 800 mm deep racks
WPN-ASS-141100-B	1U shelf, for 1000 mm deep racks

COOLING FAN

Fan for rack cabinets complete with 2m connection cable and STK9 (Schuko) plug.

› Color RAL 9005 (black)
› Complete with protection grid
› Cable lenght: 2 mt
› Power supply: 230V - 50Hz

CODE	DESCRIPTION
WPN-ACS-FAN120	WxHxD 120x120x38 mm, 220v

FAN TRAY FOR **RSA SERIES**

Ventilation unit with four fans that can be installed on top of the 19" rack RSA series. The ventilation unit has a thermostat to keep the temperature inside the cabinet under control and avoid excessive power consumption.

› Color RAL 9005 (black)
› Complete with protective grids over the fans
› Power supply: 230V - 50Hz

CODE	DESCRIPTION
WPN-ACS-S100-4	for 1000 deep cabinets, 4 fans + thermostat
WPN-ACS-S120-4	for 1200 deep cabinets, 4 fans + thermostat

FAN TRAY FOR **RNA SERIES**

Ventilation unit with 2 or 4 fans that can be installed on top of the 19" rack RNA series. The ventilation unit has a thermostat to keep the temperature inside the cabinet under control and avoid excessive power consumption.

› Color RAL 9005 (black)
› Complete with protective grids on the fans
› Power supply: 230V - 50Hz

CODE	DESCRIPTION
WPN-ACS-N060-2	for 600 deep cabinets, 2 fans + thermostat
WPN-ACS-N080-2	for 800 deep cabinets, 4 fans + thermostat
WPN-ACS-N100-2	for 1000 deep cabinets, 4 fans + thermostat

FAN TRAY FOR **RWA / RWB SERIES**

Ventilation unit with two fans that can be installed on top of the 19" rack RWA/RWB series. The ventilation unit has a thermostat to keep the temperature inside the cabinet under control and avoid excessive power consumption.

› Color RAL 9005 (black)
› Complete with protective grids over the fans
› Power supply: 230V - 50Hz

CODE	DESCRIPTION
WPN-ACS-W040-2	for RWA 450 deep cabinets, 2 fans + thermostat
WPN-ACS-W050-2	for RWB 500 deep cabinets, 2 fans + thermostat
WPN-ACS-W060-2	for RWB 600 deep cabinets, 2 fans + thermostat

CABLE MANAGEMENT & PANELS RACK

CABLE MANAGEMENT PANEL

› 4 sets of screws included (screws + cage nuts)
› colour RAL 9005 [black]

CODE	DESCRIPTION
WPN-ACM-101-B	cable management panel 1U
WPN-ACM-201-B	cable guide with brush 1U

CABLE MANAGEMENT PANEL WITH COVER

› 4 sets of screws included (screws + cage nuts)
› colour RAL 9005 [black]

CODE	DESCRIPTION
WPN-ACM-301-B	cable management panel 1U
WPN-ACM-302-B	cable management panel 2U

BLANK PANEL

Metal solid panel standard 19", 1 unit, to close unused cabinet spaces. The use of these blank panels forces cooling air from the ventilation unit (if installed) to pass through the active equipment in the rack.

› 4 sets of screws included (screws + cage nuts)
› colour RAL 9005 [black]

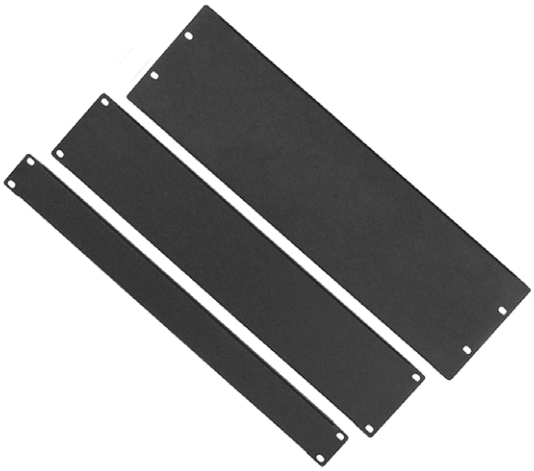

CODE	DESCRIPTION
WPN-ABP-1-B	blank panel 1U
WPN-ABP-2-B	blank panel 2U
WPN-ABP-3-B	blank panel 3U

SCREWLESS BLANK PANEL

Metal solid panel standard 19", 1 unit, to close unused cabinet spaces. The use of these blank panels forces cooling air from the ventilation unit (if installed) to pass through the active equipment in the rack.

› colour RAL 9005 [black]

CODE	DESCRIPTION
WPN-ABP-1SL-B	screwless blank panel 1U
WPN-ABP-2SL-B	screwless blank panel 2U
WPN-ABP-3SL-B	screwless blank panel 3U

SCREWS SET

The kit consists of 20/50 screws, washers and cage nuts suitable for installation of rack accessories and components.

CODE	DESCRIPTION
WPN-AVA-SS20	Nuts and bolts kit, 20 pcs
WPN-AVA-SS50	Nuts and bolts kit, 50 pcs

DIN BAR

2U Din Bar for 19" Racks

› For mounting DIN equipment in to a 19" rack
› Adjustable depth 65 – 290 mm
› Material: SPCC
› Color: RAL9005 (black)

CODE	DESCRIPTION
WPN-AVA-DR01	width 415 mm | height 2U

BASE FOR **RNA SERIES**

Metal base for cabinets RNA series to replace the wheels and feet.

› Color RAL 9005 (black)

CODE	DESCRIPTION
WPN-APT-N66	600x600 mm
WPN-APT-N68	600x800 mm

BOTTOM PLATE FOR **RSA SERIES**

› With 2 holes for cable entry and 2 brushes
› Color RAL 9005 (black)

CODE	DESCRIPTION
WPN-ABS-RSA610-B	600 x 1000 mm
WPN-ABS-RSA812-B	800 x 1200 mm

MULTIPLE SOCKET POWER

RACK 19" MULTIPLE SOCKET **WITH ON/OFF SWITCH**

› Aluminium body
› 1,5 Unit
› Power switch with light and safetey cover
› Child Protection
› Max voltage: 250V/3500W
› Cable: H05VV-F 3G 1,5 mm2 - 2 mt.

CODE	DESCRIPTION
WPN-PDU-G01-06	6 Universal Schuko sockets | Schuko Plug 16A
WPN-PDU-G01-08	8 Universal Schuko sockets | Schuko Plug 16A
WPN-PDU-C01-08	8 Universal Schuko sockets | IEC320 C14 Plug

RACK 19" MULTIPLE SOCKET **WITH 2P CIRCUIT BRAKER 1A/60A**

› Aluminium body
› 1,5 Unit
› 2P circuit braker 1A/60A with safety cover
› Child Protection
› Max voltage: 250V/3500W
› Cable: H05VV-F 3G 1,5 mm2 - 2 mt.

CODE	DESCRIPTION
WPN-PDU-G02-06	6 Universal Schuko sockets | Schuko Plug 16A
WPN-PDU-G02-12	12 Universal Schuko sockets | Schuko Plug 16A

RACK 19" MULTIPLE SOCKET **WITH SURGE PROTECTION**

› Aluminium body
› 1,5 Unit
› 3 lights surge protective device
› Child Protection
› Max voltage: 250V/3500W
› Cable: H05VV-F 3G 1,5 mm2 - 2 mt.

CODE	DESCRIPTION
WPN-PDU-G06-06	6 Universal Schuko sockets | Schuko Plug 16A

RACK 19" MULTIPLE SOCKET **IEC WITH ON/OFF SWITCH**

› Aluminium body
› 1,5 Unit
› Power switch with light and safetey cover
› Child Protection
› Max voltage: 250V/3500W
› Cable: H05VV-F 3G 1,5 mm2 - 2 mt.

CODE	DESCRIPTION
WPN-PDU-G05-08	8 IEC (VDE) sockets | Schuko Plug 16A

FIBER OPTIC

Fiber optic cables are used anywhere where large quantities of data need to be transmitted quickly and reliably. They offer better transmission at a higher bandwidth, produce no background noise during phone calls and guarantee security against interception.

The **WP Cabling® Fiber Optic Patch Cables** and related components provide high quality connections, from telecommunication rooms to data centers. Our fiber optic patch cables meet the highest quality standards for building reliable and low maintenance networks.

9/125	Singlemode	OS1/2	up to 100 Gbit/s / 40 km
62,5/125	Multimode	OM1	up to 1 Gbit/s / 300 m
50/125	Multimode	OM2	up to 1 Gbit/s / 500 m
50/125	Multimode	OM3	up to 10 Gbit/s / 500 m
50/125	Multimode	OM4	up to 40 Gbit/s / 125 m

LC - duplex	SC - duplex	ST - duplex

DUPLEX JUMPER **9/125µ SINGLEMODE**

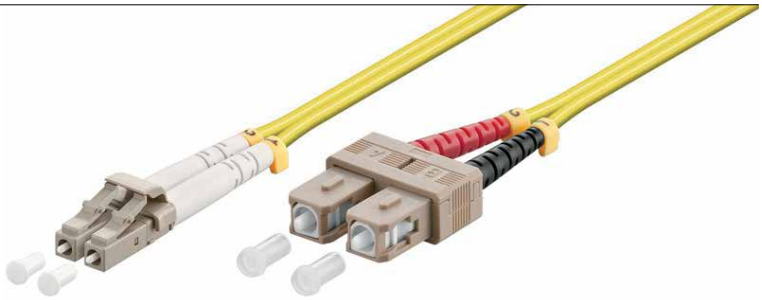

› **Fiber** I-VH 2G 9/125µ OS1/2
› **Jacket** LSZH, yellow, 3.0 mm Ø
› **Application** up to 100 Gbit/s / 40 km
› **Standard** DIN EN 50173-1 and IEC/ISO 11801

Mt	LC-LC	SC-SC	ST-ST	LC-SC	LC-ST	ST-SC
0.5	WPC-FP0-9LCLC-005	WPC-FP0-9SCSC-005	WPC-FP0-9STST-005	WPC-FP0-9LCSC-005	WPC-FP0-9LCST-005	WPC-FP0-9STSC-005
1.0	WPC-FP0-9LCLC-010	WPC-FP0-9SCSC-010	WPC-FP0-9STST-010	WPC-FP0-9LCSC-010	WPC-FP0-9LCST-010	WPC-FP0-9STSC-010
2.0	WPC-FP0-9LCLC-020	WPC-FP0-9SCSC-020	WPC-FP0-9STST-020	WPC-FP0-9LCSC-020	WPC-FP0-9LCST-020	WPC-FP0-9STSC-020
3.0	WPC-FP0-9LCLC-030	WPC-FP0-9SCSC-030	WPC-FP0-9STST-030	WPC-FP0-9LCSC-030	WPC-FP0-9LCST-030	WPC-FP0-9STSC-030
5.0	WPC-FP0-9LCLC-050	WPC-FP0-9SCSC-050	WPC-FP0-9STST-050	WPC-FP0-9LCSC-050	WPC-FP0-9LCST-050	WPC-FP0-9STSC-050
7.5	WPC-FP0-9LCLC-075	WPC-FP0-9SCSC-075	WPC-FP0-9STST-075	WPC-FP0-9LCSC-075	WPC-FP0-9LCST-075	WPC-FP0-9STSC-075
10.0	WPC-FP0-9LCLC-100	WPC-FP0-9SCSC-100	WPC-FP0-9STST-100	WPC-FP0-9LCSC-100	WPC-FP0-9LCST-100	WPC-FP0-9STSC-100

DUPLEX JUMPER **62,5/125µ MULTIMODE**

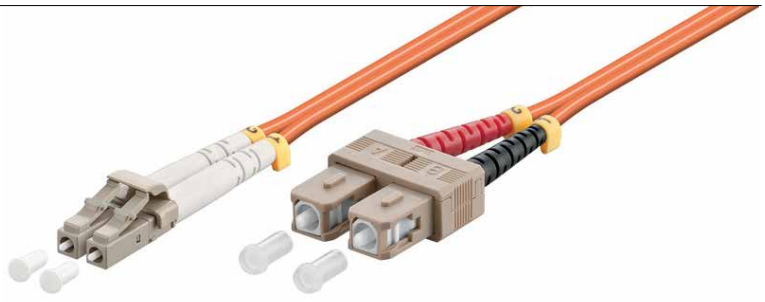

› **Fiber** I-VH 2G 62,5/125µ OM1
› **Jacket** LSZH, orange, 3.0 mm Ø
› **Application** up to 1 Gbit/s / 300 m
› **Standard** DIN EN 50173-1 and IEC/ISO 11801

Mt	LC-LC	SC-SC	ST-ST	LC-SC	LC-ST	ST-SC
0.5	WPC-FP1-6LCLC-005	WPC-FP1-6SCSC-005	WPC-FP1-6STST-005	WPC-FP1-6LCSC-005	WPC-FP1-6LCST-005	WPC-FP1-6STSC-005
1.0	WPC-FP1-6LCLC-010	WPC-FP1-6SCSC-010	WPC-FP1-6STST-010	WPC-FP1-6LCSC-010	WPC-FP1-6LCST-010	WPC-FP1-6STSC-010
2.0	WPC-FP1-6LCLC-020	WPC-FP1-6SCSC-020	WPC-FP1-6STST-020	WPC-FP1-6LCSC-020	WPC-FP1-6LCST-020	WPC-FP1-6STSC-020
3.0	WPC-FP1-6LCLC-030	WPC-FP1-6SCSC-030	WPC-FP1-6STST-030	WPC-FP1-6LCSC-030	WPC-FP1-6LCST-030	WPC-FP1-6STSC-030
5.0	WPC-FP1-6LCLC-050	WPC-FP1-6SCSC-050	WPC-FP1-6STST-050	WPC-FP1-6LCSC-050	WPC-FP1-6LCST-050	WPC-FP1-6STSC-050
7.5	WPC-FP1-6LCLC-075	WPC-FP1-6SCSC-075	WPC-FP1-6STST-075	WPC-FP1-6LCSC-075	WPC-FP1-6LCST-075	WPC-FP1-6STSC-075
10.0	WPC-FP1-6LCLC-100	WPC-FP1-6SCSC-100	WPC-FP1-6STST-100	WPC-FP1-6LCSC-100	WPC-FP1-6LCST-100	WPC-FP1-6STSC-100

DUPLEX JUMPER **50/125µ MULTIMODE**

› **Fiber** I-VH 2G 50/125µ OM2
› **Jacket** LSZH, orange, 3.0 mm Ø
› **Application** up to 10 Gbit/s / 500 m
› **Standard** DIN EN 50173-1 and IEC/ISO 11801

Mt	LC-LC	SC-SC	ST-ST	LC-SC	LC-ST	ST-SC
0.5	WPC-FP2-5LCLC-005	WPC-FP2-5SCSC-005	WPC-FP2-5STST-005	WPC-FP2-5LCSC-005	WPC-FP2-5LCST-005	WPC-FP2-5STSC-005
1.0	WPC-FP2-5LCLC-010	WPC-FP2-5SCSC-010	WPC-FP2-5STST-010	WPC-FP2-5LCSC-010	WPC-FP2-5LCST-010	WPC-FP2-5STSC-010
2.0	WPC-FP2-5LCLC-020	WPC-FP2-5SCSC-020	WPC-FP2-5STST-020	WPC-FP2-5LCSC-020	WPC-FP2-5LCST-020	WPC-FP2-5STSC-020
3.0	WPC-FP2-5LCLC-030	WPC-FP2-5SCSC-030	WPC-FP2-5STST-030	WPC-FP2-5LCSC-030	WPC-FP2-5LCST-030	WPC-FP2-5STSC-030
5.0	WPC-FP2-5LCLC-050	WPC-FP2-5SCSC-050	WPC-FP2-5STST-050	WPC-FP2-5LCSC-050	WPC-FP2-5LCST-050	WPC-FP2-5STSC-050
7.5	WPC-FP2-5LCLC-075	WPC-FP2-5SCSC-075	WPC-FP2-5STST-075	WPC-FP2-5LCSC-075	WPC-FP2-5LCST-075	WPC-FP2-5STSC-075
10.0	WPC-FP2-5LCLC-100	WPC-FP2-5SCSC-100	WPC-FP2-5STST-100	WPC-FP2-5LCSC-100	WPC-FP2-5LCST-100	WPC-FP2-5STSC-100

DUPLEX JUMPER **50/125µ MULTIMODE**

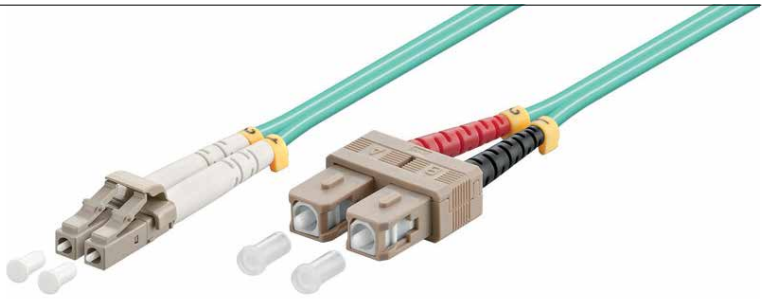

› **Fiber** I-VH 2G 50/125µ OM3
› **Jacket** LSZH, aqua, 3.0 mm Ø
› **Application** up to 10 Gbit/s / 500 m
› **Standard** DIN EN 50173-1 and IEC/ISO 11801

Mt	LC-LC	SC-SC	ST-ST	LC-SC	LC-ST	ST-SC
0.5	WPC-FP3-5LCLC-005	WPC-FP3-5SCSC-005	WPC-FP3-5STST-005	WPC-FP3-5LCSC-005	WPC-FP3-5LCST-005	WPC-FP3-5STSC-005
1.0	WPC-FP3-5LCLC-010	WPC-FP3-5SCSC-010	WPC-FP3-5STST-010	WPC-FP3-5LCSC-010	WPC-FP3-5LCST-010	WPC-FP3-5STSC-010
2.0	WPC-FP3-5LCLC-020	WPC-FP3-5SCSC-020	WPC-FP3-5STST-020	WPC-FP3-5LCSC-020	WPC-FP3-5LCST-020	WPC-FP3-5STSC-020
3.0	WPC-FP3-5LCLC-030	WPC-FP3-5SCSC-030	WPC-FP3-5STST-030	WPC-FP3-5LCSC-030	WPC-FP3-5LCST-030	WPC-FP3-5STSC-030
5.0	WPC-FP3-5LCLC-050	WPC-FP3-5SCSC-050	WPC-FP3-5STST-050	WPC-FP3-5LCSC-050	WPC-FP3-5LCST-050	WPC-FP3-5STSC-050
7.5	WPC-FP3-5LCLC-075	WPC-FP3-5SCSC-075	WPC-FP3-5STST-075	WPC-FP3-5LCSC-075	WPC-FP3-5LCST-075	WPC-FP3-5STSC-075
10.0	WPC-FP3-5LCLC-100	WPC-FP3-5SCSC-100	WPC-FP3-5STST-100	WPC-FP3-5LCSC-100	WPC-FP3-5LCST-100	WPC-FP3-5STSC-100

DUPLEX JUMPER **50/125µ MULTIMODE**

› **Fiber** I-VH 2G 50/125µ OM4
› **Jacket** LSZH, violet, 3.0 mm Ø
› **Application** up to 40 Gbit/s / 125 m
› **Standard** DIN EN 50173-1 and IEC/ISO 11801

Mt	LC-LC	SC-SC	ST-ST	LC-SC	LC-ST	ST-SC
0.5	WPC-FP4-5LCLC-005	WPC-FP4-5SCSC-005	---	---	WPC-FP4-5LCST-005	WPC-FP4-5STSC-005
1.0	WPC-FP4-5LCLC-010	WPC-FP4-5SCSC-010	---	---	WPC-FP4-5LCST-010	WPC-FP4-5STSC-010
2.0	WPC-FP4-5LCLC-020	WPC-FP4-5SCSC-020	---	---	WPC-FP4-5LCST-020	WPC-FP4-5STSC-020
3.0	WPC-FP4-5LCLC-030	WPC-FP4-5SCSC-030	---	---	WPC-FP4-5LCST-030	WPC-FP4-5STSC-030
5.0	WPC-FP4-5LCLC-050	WPC-FP4-5SCSC-050	---	---	WPC-FP4-5LCST-050	WPC-FP4-5STSC-050
7.5	WPC-FP4-5LCLC-075	WPC-FP4-5SCSC-075	---	---	WPC-FP4-5LCST-075	WPC-FP4-5STSC-075
10.0	WPC-FP4-5LCLC-100	WPC-FP4-5SCSC-100	---	---	WPC-FP4-5LCST-100	WPC-FP4-5STSC-100

MODULAR FIBER OPTIC **SPLICE BOX, 1U**

› Unassembled, without front panel
› Carrier housing made of 1.5 mm sheet steel, varnished
› 2 cable entries
› Fiber cable management system
› Width 435 mm, depth 204 mm
› Height 1 U
› Color Black (RAL 9005)

CODE	
WPC-FPP-B1U-B	1U | without front panel | Black RAL 9005

FRONT PANELS

CODE	DESCRIPTION
WPC-FPP-P0112-B	LC Duplex/SC Simplex 12 ports, Black RAL 9005

CODE	DESCRIPTION
WPC-FPP-P0124-B	LC Duplex/SC Simplex 24 ports, Black RAL 9005

CODE	DESCRIPTION
WPC-FPP-P0212-B	SC Duplex 12 ports, Black RAL 9005

CODE	DESCRIPTION
WPC-FPP-P0224-B	SC Duplex 24 ports, Black RAL 9005

CODE	DESCRIPTION
WPC-FPP-P0312-B	ST Simplex 12 ports, Black RAL 9005

CODE	DESCRIPTION
WPC-FPP-P0324-B	ST Simplex 24 ports, Black RAL 9005

ADAPTER MULTIMODE
LC-LC OM2, DUPLEX

CODE	DESCRIPTION
WPC-FA2-LC0201	LC-LC OM2 Adapter, Multimode, Plastic housing

ADAPTER MULTIMODE
SC-SC OM2, DUPLEX

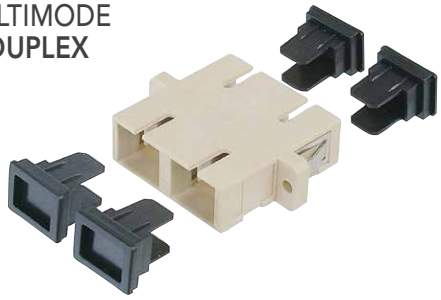

CODE	DESCRIPTION
WPC-FA2-SC0201	SC-SC OM2 Adapter, Multimode, Plastic housing

ADAPTER MULTIMODE
LC-LC OM3, DUPLEX



CODE	DESCRIPTION
WPC-FA3-LC0201	LC-LC OM3 Adapter, Multimode, Plastic housing

ADAPTER MULTIMODE
SC-SC OM3, DUPLEX

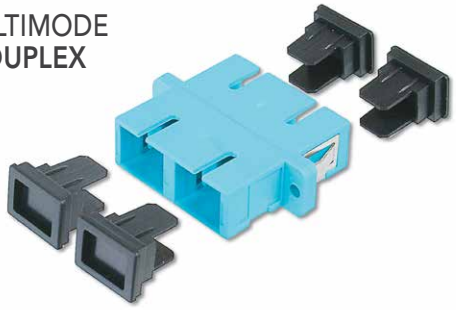

CODE	DESCRIPTION
WPC-FA3-SC0201	SC-SC OM3 Adapter, Multimode,Plastic housing

ADAPTER MULTIMODE
LC-LC OM4, DUPLEX



CODE	DESCRIPTION
WPC-FA4-LC0201	LC-LC OM4 Adapter, Multimode, Plastic housing

ADAPTER MULTIMODE
SC-SC OM4, DUPLEX

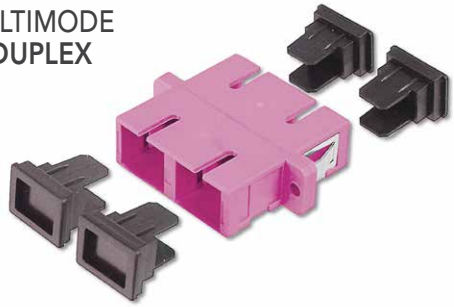

CODE	DESCRIPTION
WPC-FA4-SC0201	SC-SC OM4 Adapter, Multimode, Plastic housing

ADAPTER SINGLEMODE
ST-ST, SIMPLEX

CODE	DESCRIPTION
WPC-FA0-ST01	ST-ST Adapter, Singlemode, Metal housing

ADAPTER MULTIMODE
ST-ST, SIMPLEX

CODE	DESCRIPTION
WPC-FA0-ST02	ST-ST Adapter, Multimode, Metal housing

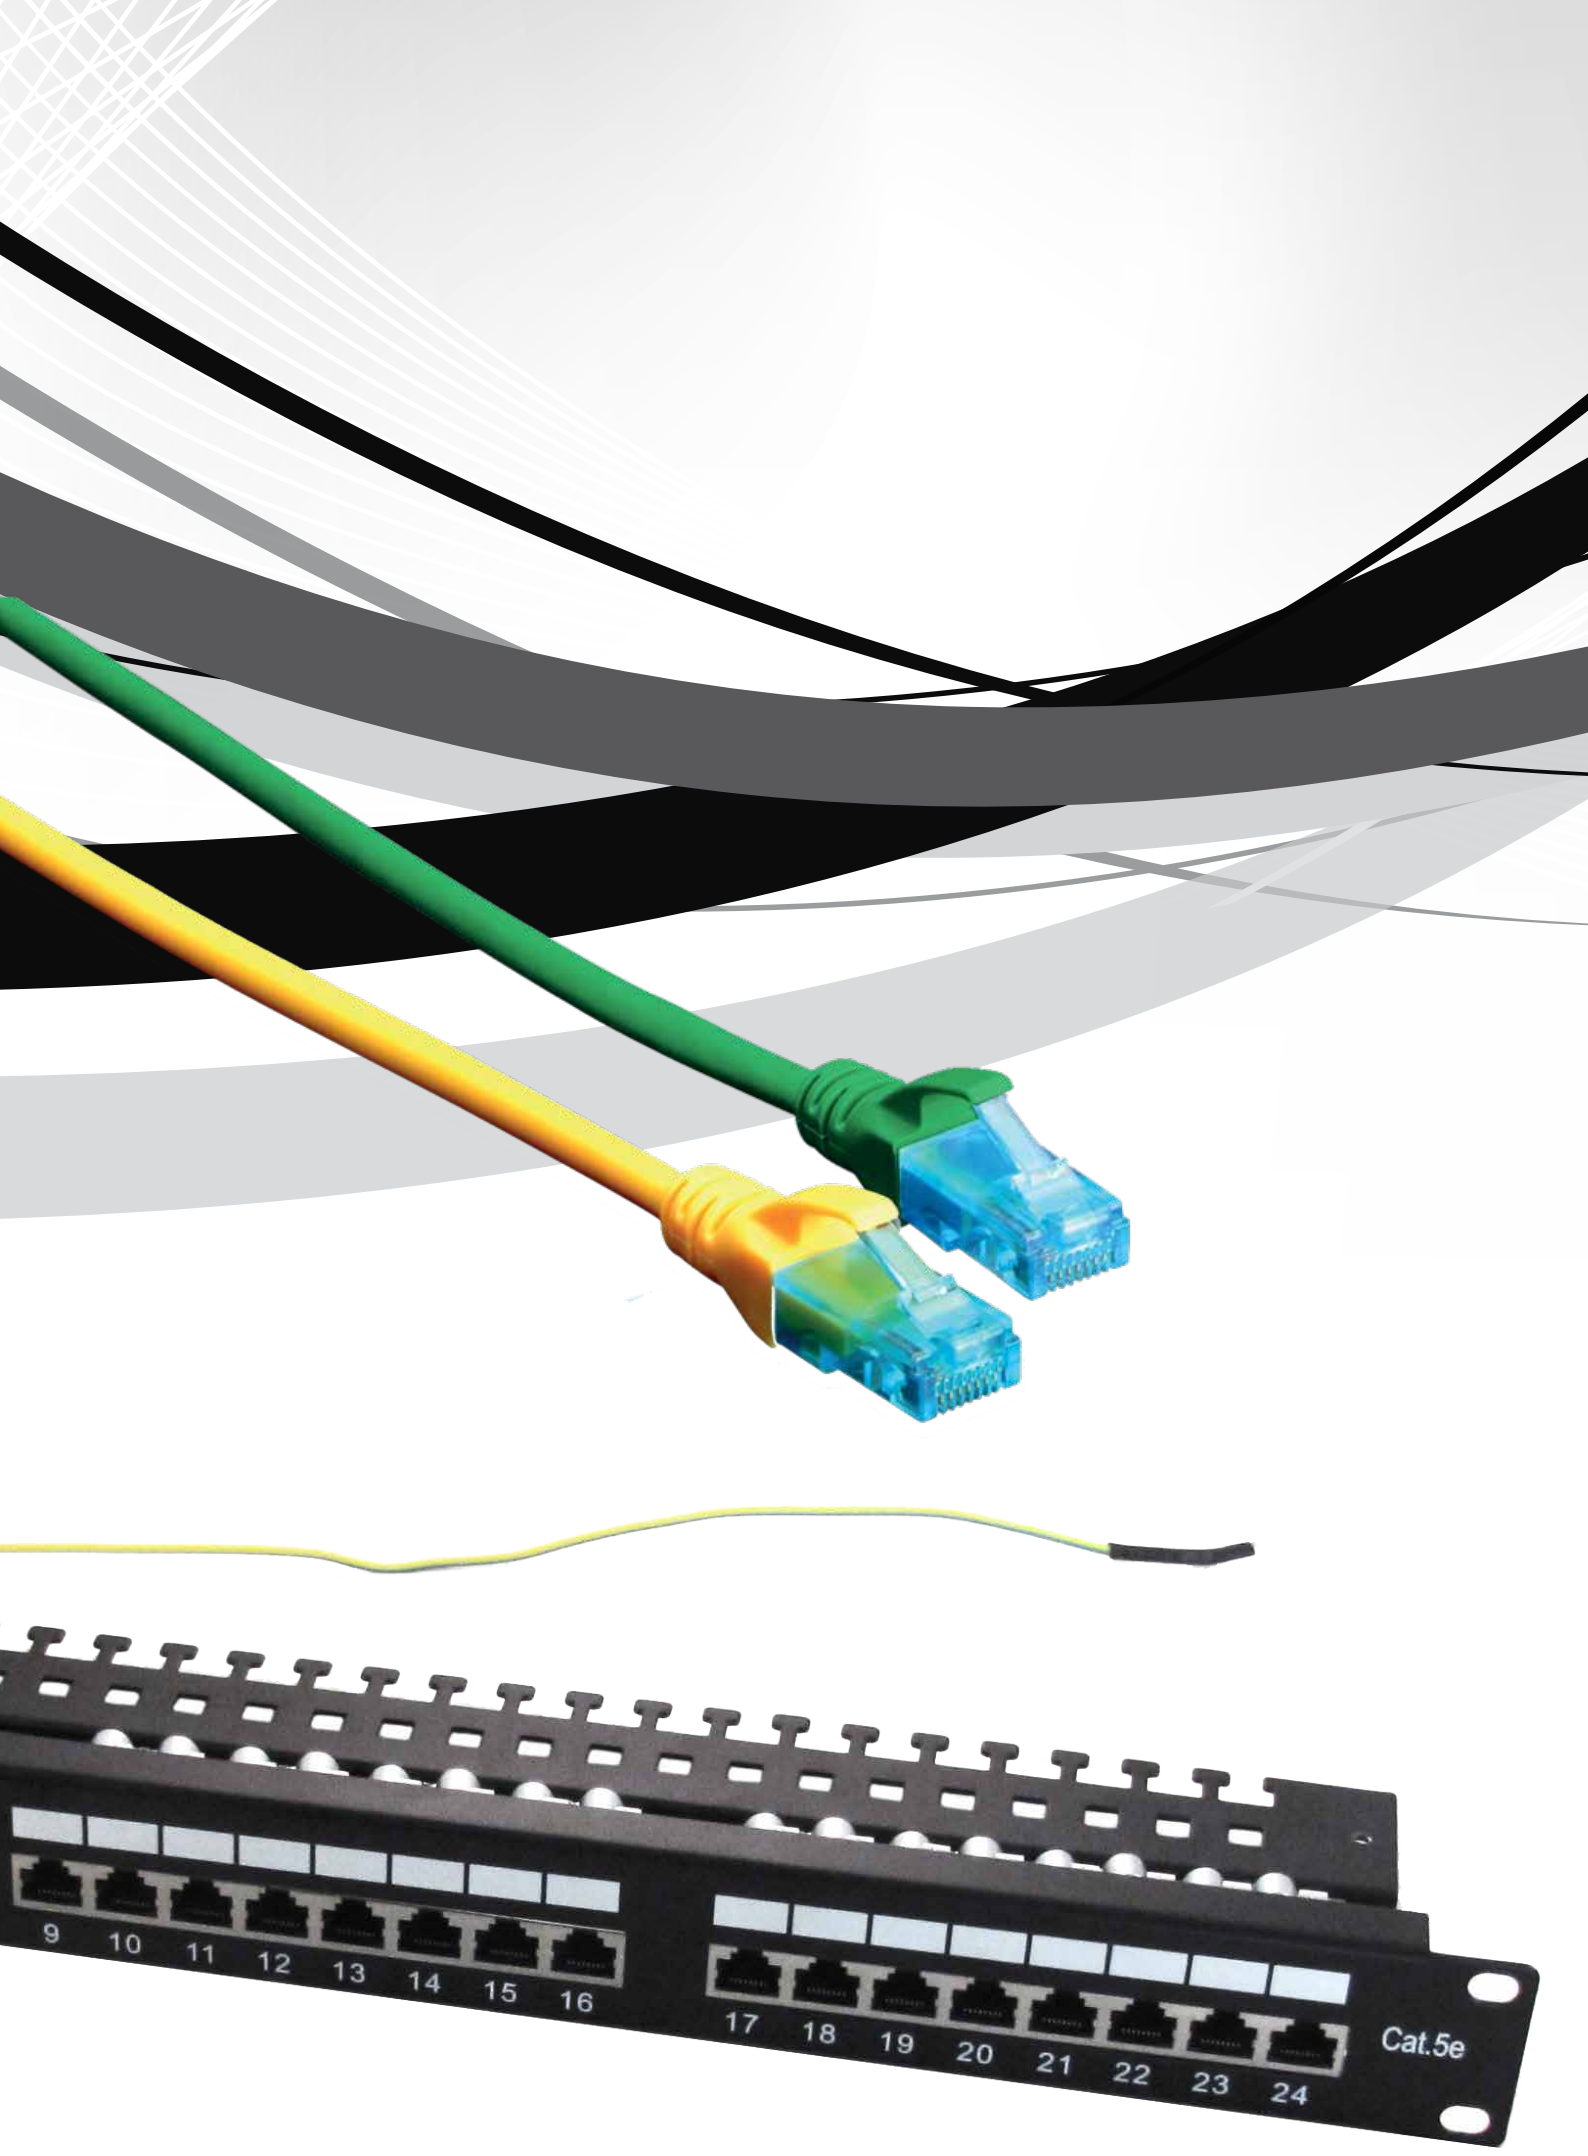
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
Cat.5e

COPPER COMPONENTS

Network cables and components must be choose correctly, in order to obtain the maximum efficiency in all application of use.
Copper wiring benefits are many: high conductivity, flexibility, high melting point, long-term compatibility and a quick and easy installation.

WP Cabling® offers a wide range of **patch cables**, **twisted pair installation cables** as well as **keystone modules**, **couplers** and **plug-in connectors** guaranteeing reliable solutions and the highest performances in any field.

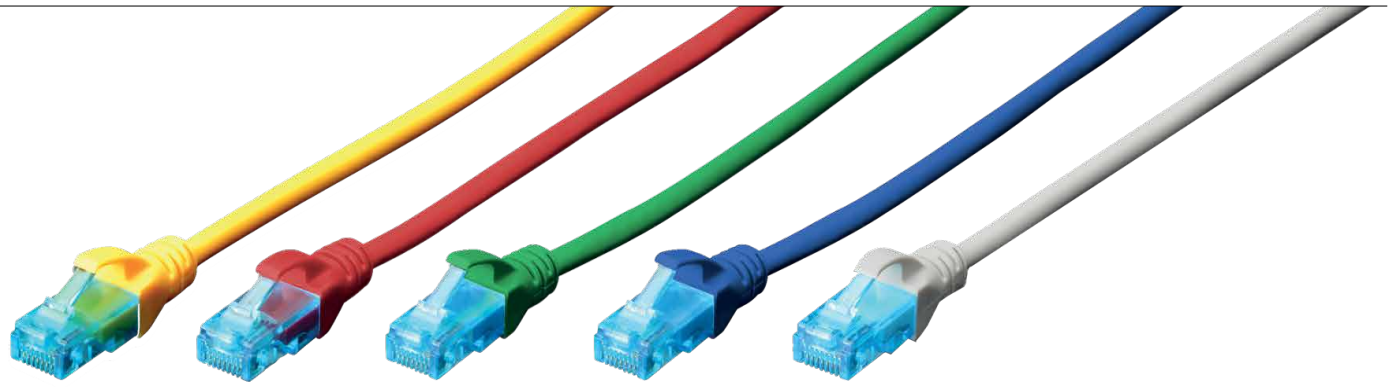

NETWORK PATCH CABLE **CAT.5E U-UTP COPPER**

› anti-stress covers protecting connectors RJ45
› cable sheath in PVC assuring flexibility and duration
› cable: 4 pairs, 26AWG
› well-supported applications: 10BaseT, 100BaseTX, 1000BaseTX (Gigabit)

Mt	GRAY	RED	BLUE	GREEN	YELLOW	WHITE	BLACK
0.5	WPC-PAT-5U005	WPC-PAT-5U005R	WPC-PAT-5U005B	WPC-PAT-5U005G	WPC-PAT-5U005Y	WPC-PAT-5U005W	WPC-PAT-5U005BL
1.0	WPC-PAT-5U010	WPC-PAT-5U010R	WPC-PAT-5U010B	WPC-PAT-5U010G	WPC-PAT-5U010Y	WPC-PAT-5U010W	WPC-PAT-5U010BL
2.0	WPC-PAT-5U020	WPC-PAT-5U010R	WPC-PAT-5U020B	WPC-PAT-5U020G	WPC-PAT-5U020Y	WPC-PAT-5U020W	WPC-PAT-5U020BL
3.0	WPC-PAT-5U030	WPC-PAT-5U030R	WPC-PAT-5U030B	WPC-PAT-5U030G	WPC-PAT-5U030Y	WPC-PAT-5U030W	WPC-PAT-5U030BL
5.0	WPC-PAT-5U050	WPC-PAT-5U050R	WPC-PAT-5U050B	WPC-PAT-5U050G	WPC-PAT-5U050Y	WPC-PAT-5U050W	WPC-PAT-5U050BL
7.0	WPC-PAT-5U070	---	---	---	---	---	---
10.0	WPC-PAT-5U100	---	---	---	---	---	---
15.0	WPC-PAT-5U150	---	---	---	---	---	---
20.0	WPC-PAT-5U200	---	---	---	---	---	---
30.0	WPC-PAT-5U300	---	---	---	---	---	---

NETWORK PATCH CABLE **CAT. 5E F-UTP COPPER**

› anti-stress covers protecting connectors RJ45
› cable sheath in PVC assuring flexibility and duration
› cable: 4 pairs, 26AWG
› well-supported applications: 10BaseT, 100BaseTX, 1000BaseTX (Gigabit)

Mt	GRAY	RED	BLUE	GREEN	YELLOW	WHITE	BLACK
0.5	WPC-PAT-5F005	WPC-PAT-5F005R	WPC-PAT-5F005B	WPC-PAT-5F005G	WPC-PAT-5F005Y	WPC-PAT-5F005W	WPC-PAT-5F005BL
1.0	WPC-PAT-5F010	WPC-PAT-5F010R	WPC-PAT-5F010B	WPC-PAT-5F010G	WPC-PAT-5F010Y	WPC-PAT-5F010W	WPC-PAT-5F010BL
2.0	WPC-PAT-5F020	WPC-PAT-5F020R	WPC-PAT-5F020B	WPC-PAT-5F020G	WPC-PAT-5F020Y	WPC-PAT-5F020W	WPC-PAT-5F020BL
3.0	WPC-PAT-5F030	WPC-PAT-5F030R	WPC-PAT-5F030B	WPC-PAT-5F030G	WPC-PAT-5F030Y	WPC-PAT-5F030W	WPC-PAT-5F030BL
5.0	WPC-PAT-5F050	WPC-PAT-5F050R	WPC-PAT-5F050B	WPC-PAT-5F050G	WPC-PAT-5F050Y	WPC-PAT-5F050W	WPC-PAT-5F050BL
7.0	WPC-PAT-5F070	---	---	---	---	---	---
10.0	WPC-PAT-5F100	---	---	---	---	---	---
15.0	WPC-PAT-5F150	---	---	---	---	---	---
20.0	WPC-PAT-5F200	---	---	---	---	---	---
30.0	WPC-PAT-5F300	---	---	---	---	---	---

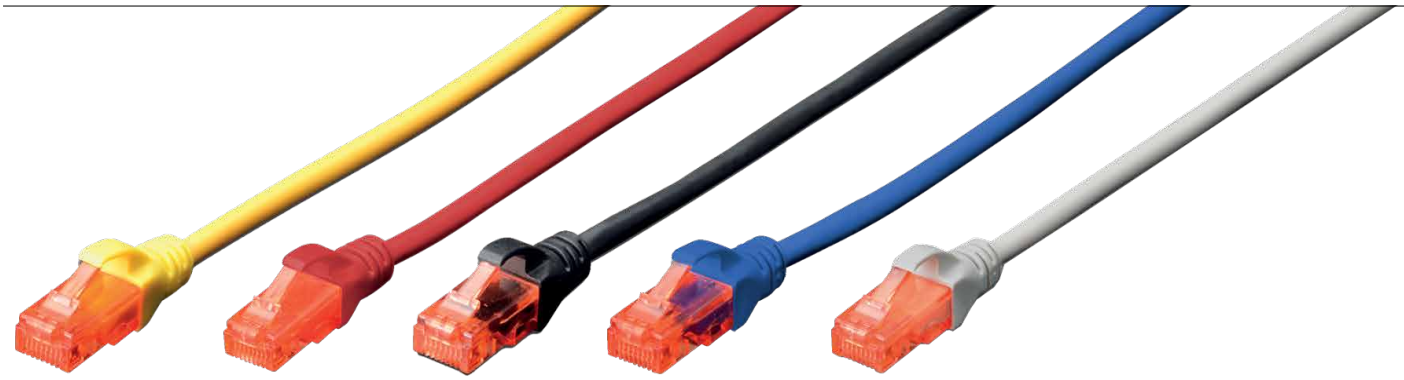

NETWORK PATCH CABLE **CAT. 5E F-UTP CROSSOVER COPPER**

› anti-stress covers protecting connectors RJ45
› cable sheath in PVC assuring flexibility and duration
› cable: 4 pairs, 26AWG
› well-supported applications: 10BaseT, 100BaseTX, 1000BaseTX (Gigabit)

Mt	GRAY	RED	BLUE	GREEN	YELLOW	WHITE	BLACK
1.0	WPC-PAT-5F010-CRO	---	---	---	---	---	---
2.0	WPC-PAT-5F020-CRO	---	---	---	---	---	---
3.0	WPC-PAT-5F030-CRO	---	---	---	---	---	---
5.0	WPC-PAT-5F050-CRO	---	---	---	---	---	---
7.0	WPC-PAT-5F070-CRO	---	---	---	---	---	---
10.0	WPC-PAT-5F100-CRO	---	---	---	---	---	---

NETWORK PATCH CABLE **CAT.6 U-UTP COPPER**

› anti-stress covers protecting connectors RJ45
› cable sheath in PVC assuring flexibility and duration
› cable: 4 pairs, 24AWG
› well-supported applications: 10BaseT, 100BaseTX, 1000BaseTX (Gigabit)

Mt	GRAY	RED	BLUE	GREEN	YELLOW	WHITE	BLACK
0.5	WPC-PAT-6U005	WPC-PAT-6U005R	WPC-PAT-6U005B	WPC-PAT-6U005G	WPC-PAT-6U005Y	WPC-PAT-6U005W	WPC-PAT-6U005BL
1.0	WPC-PAT-6U010	WPC-PAT-6U010R	WPC-PAT-6U010B	WPC-PAT-6U010G	WPC-PAT-6U010Y	WPC-PAT-6U010W	WPC-PAT-6U010BL
2.0	WPC-PAT-6U020	WPC-PAT-6U010R	WPC-PAT-6U020B	WPC-PAT-6U020G	WPC-PAT-6U020Y	WPC-PAT-6U020W	WPC-PAT-6U020BL
3.0	WPC-PAT-6U030	WPC-PAT-6U030R	WPC-PAT-6U030B	WPC-PAT-6U030G	WPC-PAT-6U030Y	WPC-PAT-6U030W	WPC-PAT-6U030BL
5.0	WPC-PAT-6U050	WPC-PAT-6U050R	WPC-PAT-6U050B	WPC-PAT-6U050G	WPC-PAT-6U050Y	WPC-PAT-6U050W	WPC-PAT-6U050BL
7.0	WPC-PAT-6U070	---	---	---	---	---	---
10.0	WPC-PAT-6U100	---	---	---	---	---	---
15.0	WPC-PAT-6U150	---	---	---	---	---	---
20.0	WPC-PAT-6U200	---	---	---	---	---	---

TWISTED PAIR CABLES - PREMIUM CABLING

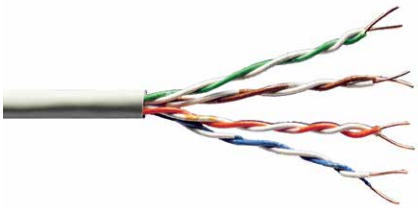

U-UTP
NOT SHIELDED

15 YEARS WARRANTY

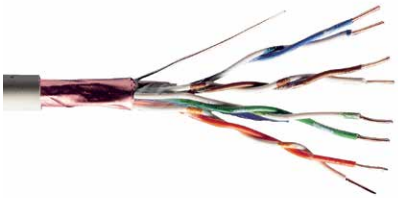

F-UTP
SHIELDED

› Excellent signal transmission
› Performance tested
› Maximum reliability
› Complies with ISO/IEC 11801, EIA/TIA 568B.2 DIN/EN 50173

TWISTED PAIR INSTALLATION CABLES CAT. 5E COPPER

CODE	Mt.	TYPE	SHIELD	AWG	JACKET
WPC-PCR-5F-100	100	STRANDED	F-UTP	AWG26/7	PVC
WPC-PCR-5F-305	305	STRANDED	F-UTP	AWG26/7	PVC
WPC-ICR-5F-100	100	SOLID	F-UTP	AWG24/1	PVC
WPC-ICR-5F-305	305	SOLID	F-UTP	AWG24/1	PVC
WPC-ICR-5F-305-ZH	100	SOLID	F-UTP	AWG24/1	LS0H
WPC-PCR-5U-100	305	STRANDED	U-UTP	AWG26/7	PVC
WPC-PCR-5U-305	305	STRANDED	U-UTP	AWG26/7	PVC
WPC-ICR-5U-100	100	SOLID	U-UTP	AWG24/1	PVC
WPC-ICR-5U-305	305	SOLID	U-UTP	AWG24/1	PVC

TWISTED PAIR INSTALLATION CABLES CAT. 6 COPPER

CODE	Mt.	TYPE	SHIELD	AWG	JACKET
WPC-ICR-6U-100	100	SOLID	U/UTP	AWG23/1	PVC
WPC-ICR-6U-305	305	SOLID	U/UTP	AWG23/1	PVC
WPC-ICR-6U-305-ZH	305	SOLID	U/UTP	AWG23/1	LS0H

TWISTED PAIR CABLES CABLING

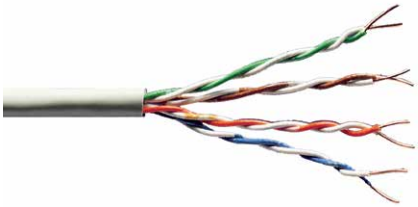

U-UTP
NOT SHIELDED

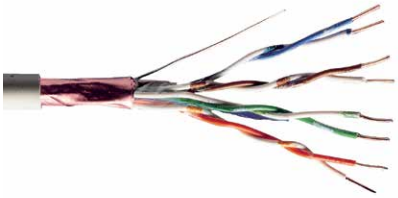

F-UTP
SHIELDED

15 YEARS WARRANTY

› Excellent signal transmission
› Performance tested
› Maximum reliability
› Complies with ISO/IEC 11801, EIA/TIA 568B.2 DIN/EN 50173

TWISTED PAIR INSTALLATION CABLES CAT. 5E CCA

CODE	Mt.	TYPE	SHIELD	AWG	JACKET
WPC-PCR-5F-100-S	100	STRANDED	F-UTP	AWG26/7	PVC
WPC-PCR-5F-305-S	305	STRANDED	F-UTP	AWG26/7	PVC
WPC-ICR-5F-100-S	100	SOLID	F-UTP	AWG24/1	PVC
WPC-ICR-5F-305-S	305	SOLID	F-UTP	AWG24/1	PVC
WPC-PCR-5U-100-S	100	STRANDED	U-UTP	AWG26/7	PVC
WPC-PCR-5U-305-S	305	STRANDED	U-UTP	AWG26/7	PVC
WPC-ICR-5U-100-S	100	SOLID	U-UTP	AWG24/1	PVC
WPC-ICR-5U-305-S	305	SOLID	U-UTP	AWG24/1	PVC

TWISTED PAIR INSTALLATION CABLES CAT. 6 CCA

CODE	Mt.	TYPE	SHIELD	AWG	JACKET
WPC-ICR-6U-100-S	100	SOLID	U/UTP	AWG23/1	PVC
WPC-ICR-6U-305-S	305	SOLID	U/UTP	AWG23/1	PVC

UTP 19" PATCH PANEL **24 RJ45 PORTS UNSHIELDED - WITH CABLE MANAGEMENT**

› ISO/IEC 11801 and EN 50173
› Cable installation via LSA strips, color codes based on EIA/TIA 568 A & B
› Suitable for 483 mm (19") rack mount
› Material housing: SECC, 1,5 mm
› Removable cable managment for fixing the cables with cable ties

CODE	DESCRIPTION
WPC-PAN-5U-24	Cat. 5e | UTP | 1U, Black
WPC-PAN-6U-24	Cat. 6 | UTP | 1U, Black

STP 19" PATCH PANEL **24 RJ45 PORTS SHIELDED**

› ISO/IEC 11801 and EN 50173
› Cable installation via LSA strips, color codes based on EIA/TIA 568 A & B
› Suitable for 483 mm (19") rack mount
› Material housing: SECC, 1,5 mm

CODE	DESCRIPTION
WPC-PAN-5F-24	Cat. 5e | STP | 1U, Black
WPC-PAN-6F-24	Cat. 6 | STP | 1U, Black

BLANK PATCH PANEL **24 PORTS**

› Universal applicable for RJ45 and Fibre Optic Modules
› Suitable for 19" installation

CODE	DESCRIPTION
WPC-PAN-BU24	Cat. 5e - 6 | UTP | Black
WPC-PAN-BF24	Cat. 5e - 6 | FTP | Black

HIGH DENSITY 19" PATCH PANEL **48 RJ45 PORTS SHIELDED**

› ISO/IEC 11801 and EN 50173
› Cable installation via LSA strips, color codes based on EIA/TIA 568 A & B
› Suitable for 483 mm (19") Rack Mount
› Material housing: SECC, 1,5 mm

CODE	DESCRIPTION
WPC-PAN-5U-48HD	Cat. 5e | UTP | 1U, Black
WPC-PAN-6U-48HD	Cat. 6 | UTP | 1U, Black

KEYSTONE **LSA**

CODE	DESCRIPTION
WPC-KEY-5F	Cat. 5e | FTP

CODE	DESCRIPTION
WPC-KEY-5U/WH	Cat. 5e | UTP White
WPC-KEY-5U/BL	Cat. 5e | UTP Black

CODE	DESCRIPTION
WPC-KEY-6U/WH	Cat. 6 | UTP White
WPC-KEY-6U/BL	Cat. 6 | UTP Black

KEYSTONE **RJ11**



CODE	DESCRIPTION
WPC-KEY-J11/WH	UTP - for telephony applications

KEYSTONE **LSA TOOL-LESS**

CODE	DESCRIPTION
WPC-KEY-5U-TL/WH	Cat. 5e | UTP White | tool-less
WPC-KEY-6U-TL/WH	Cat. 6 | UTP White | tool-less

KEYSTONE **HDMI FEMALE TO FEMALE COUPLER**

CODE	DESCRIPTION
WPC-KEY-HDMI	2x HDMI female

KEYSTONE **USB FEMALE TO FEMALE COUPLER**

CODE	DESCRIPTION
WPC-KEY-USB	2x USB female

MODULAR COUPLER **UTP**

CODE	DESCRIPTION
WPC-CPR-5U	Cat. 5e | UTP
WPC-CPR-6U	Cat. 6 | UTP

MODULAR COUPLER **FTP**

CODE	DESCRIPTION
WPC-CPR-5F	Cat. 5e | FTP
WPC-CPR-6F	Cat. 6 | FTP

MODULAR COUPLER **RJ12 6P6C**

CODE	DESCRIPTION
WPC-CPR-6P6C	2 x RJ female | RJ45 6P6C | unshielded
WPC-CPR-8P8C	2 x RJ female | RJ45 8P8C | unshielded

CONNECTION BOX FOR **TWISTED PAIR CABLES**

CODE	DESCRIPTION
WPC-ACB-5F	Cat. 5e | RJ45 8P8C
WPC-ACB-6F	Cat. 6 | RJ45 8P8C

MODULAR PLUG **UNSHIELDED**

CODE	DESCRIPTION
WPC-PLU-5U-8/8	Cat. 5e | RJ45 8P8C
WPC-PLU-6U-8/8	Cat. 6 | RJ45 8P8C

MODULAR PLUG **SHIELDED**

CODE	DESCRIPTION
WPC-PLU-5F-8/8	Cat. 5e | RJ45 8P8C
WPC-PLU-6F-8/8	Cat. 6 | RJ45 8P8C

logistical platform of over 3000 mq

technical support office
Sales representative and dedicated account

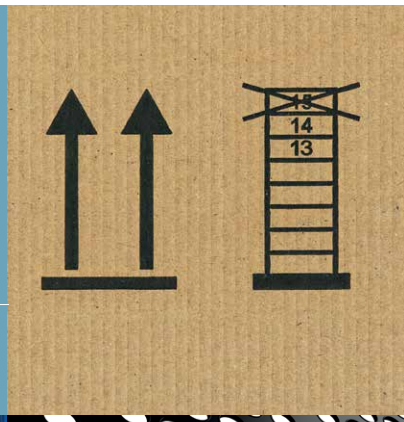

orders fullfillment within
24/48 hours

products always available
in stock

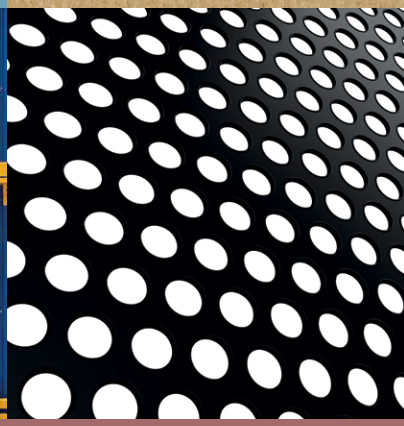

WP

pre- and post-sales support

customized configuration

reinforced packaging
to prevent damages during
transportation

forget all kinds of problem about rack
configuration!

go to www.wp-europe.info
and try the new configurator!

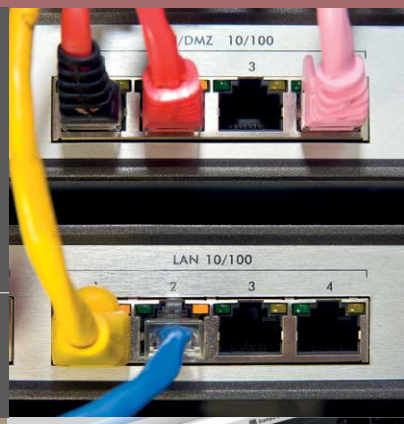

**WP offers its clients the possibility to add the configurator to their own website.
If of your interest, contact us at
sales@wp-europe.info**

WP CABLING SOLUTION
www.wp-europe.info - sales@wp-europe.info

WP CABLING

WP RACK

WP EUROPEAN CABLING SOLUTION
www.wp-europe.info
sales@wp-europe.info

follow us on www.facebook.com/wpeurope

WP RACK / WP CABLING AUTHORIZED RESELLER